
STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

DIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR NORTH	121.100 / 121.625
DOHA RADAR SOUTH	120.675 / 119.150
DOHA APP WEST	119.725 / 125.125
HAMAD TWR WEST	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNP RWY 34L
LUBET 2A (CCO) / TULUB 2A (CCO)

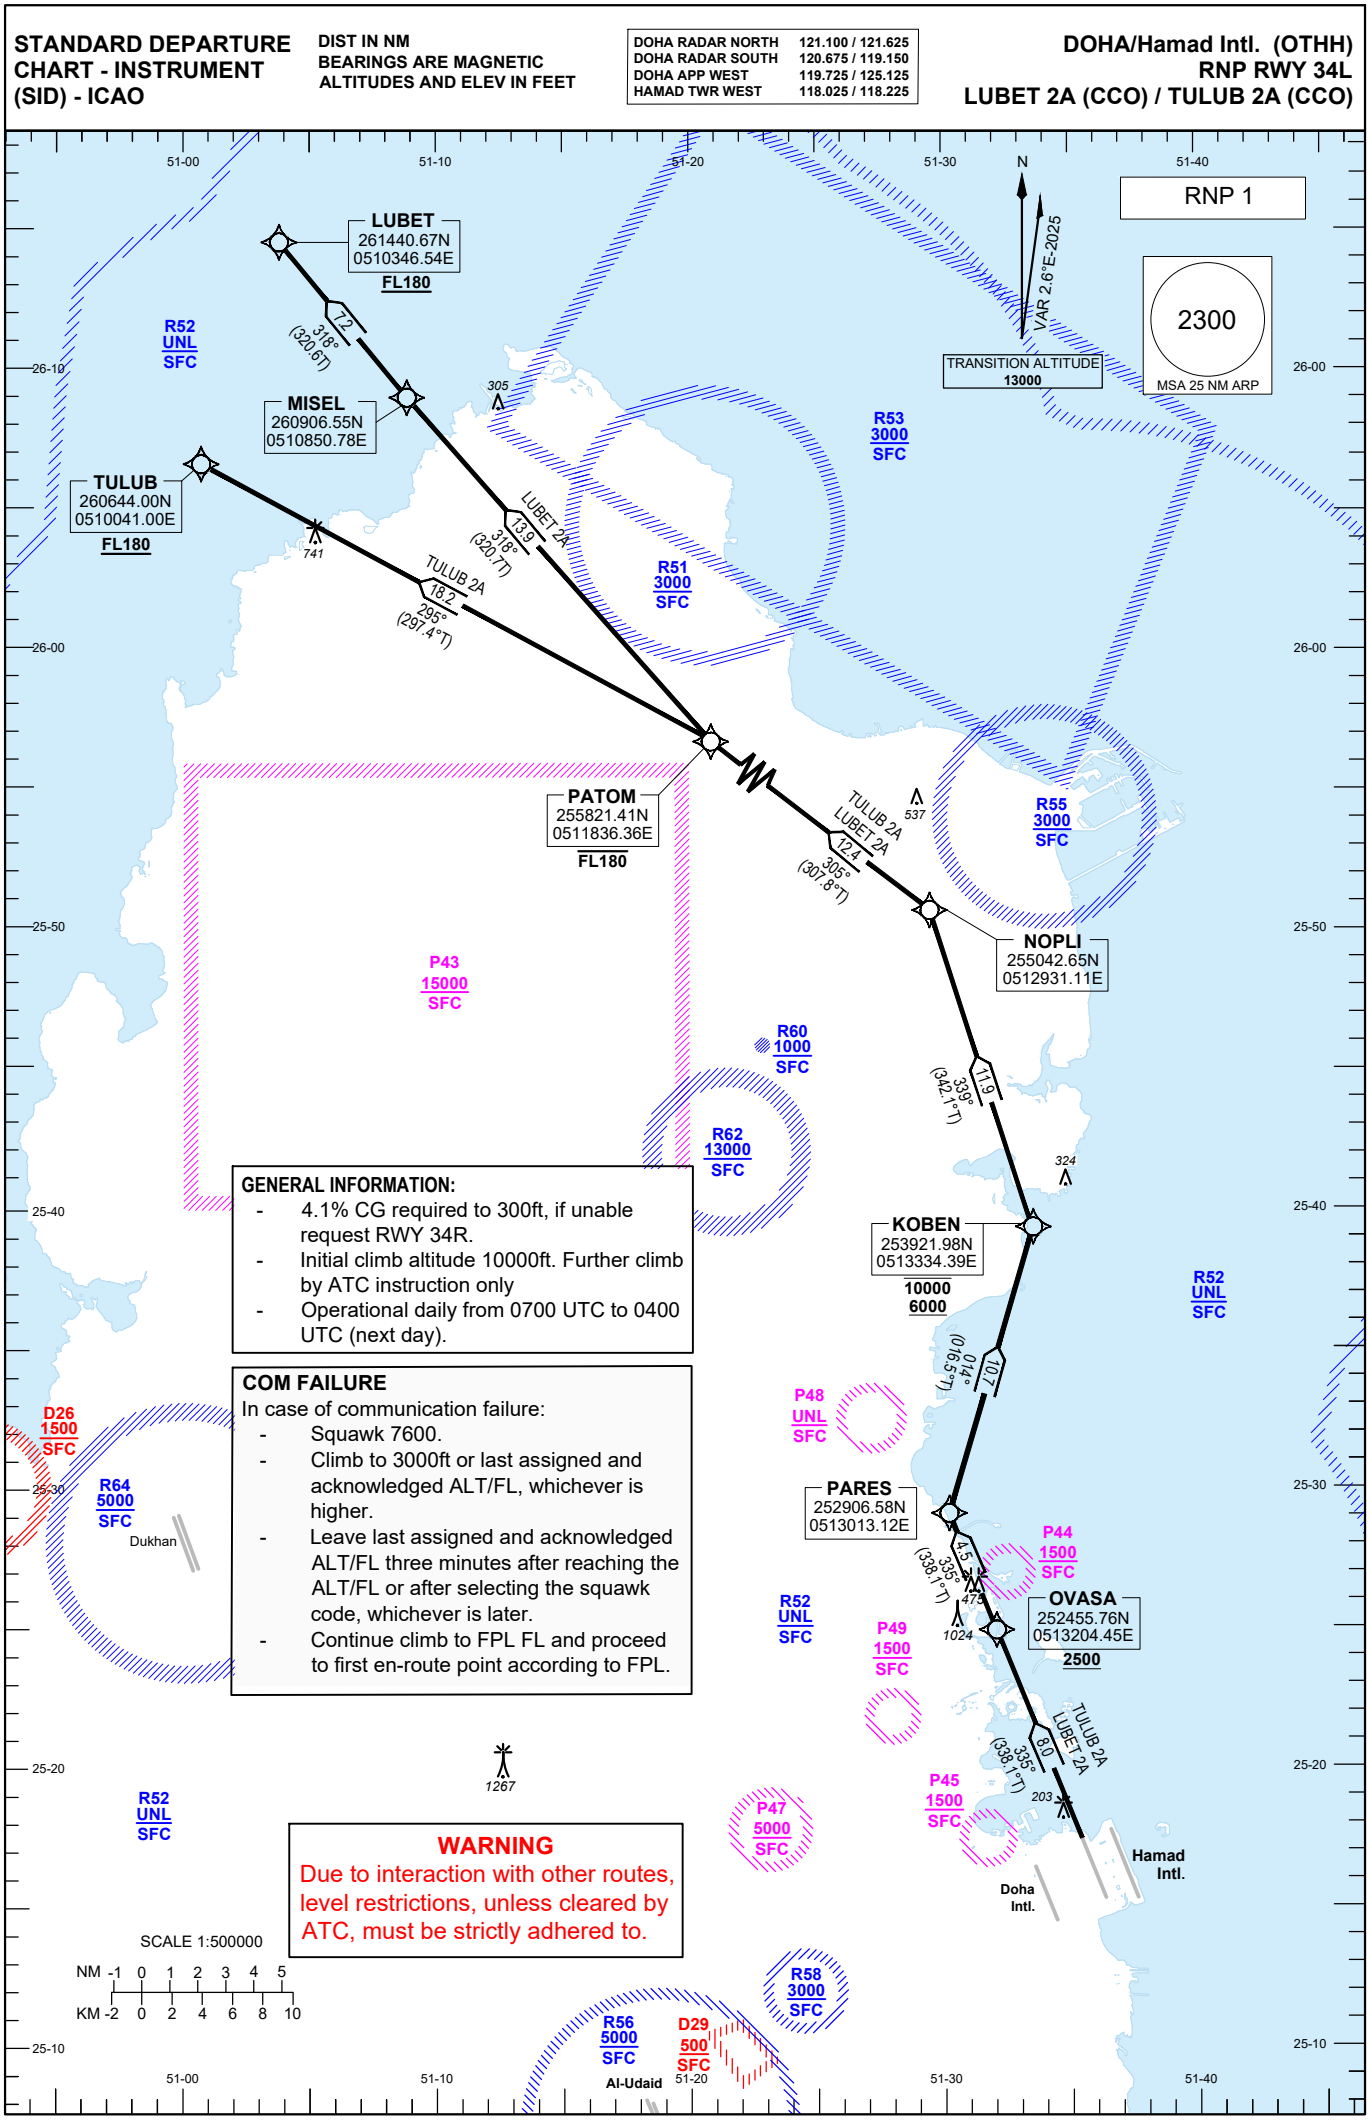

GENERAL INFORMATION:

- 4.1% CG required to 300ft, if unable request RWY 34R.
- Initial climb altitude 10000ft. Further climb by ATC instruction only
- Operational daily from 0700 UTC to 0400 UTC (next day).

COM FAILURE

In case of communication failure:

- Squawk 7600.
- Climb to 3000ft or last assigned and acknowledged ALT/FL, whichever is higher.
- Leave last assigned and acknowledged ALT/FL three minutes after reaching the ALT/FL or after selecting the squawk code, whichever is later.
- Continue climb to FPL FL and proceed to first en-route point according to FPL.

WARNING

Due to interaction with other routes, level restrictions, unless cleared by ATC, must be strictly adhered to.

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

DOHA/Hamad Intl.(OTHH)
RNP RWY 34L
LUBET 2A (CCO) / TULUB 2A (CCO)

TABULAR DESCRIPTION

RNP SID LUBET 2A (CCO)

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/ TCH(ft)	Navigation Specification
1	CF	OVASA	-	335 (338.1)	-2.6	8.0	-	+2500	-	-	RNP 1
2	TF	PARES	-	335 (338.1)	-2.6	4.5	-	-	-	-	RNP 1
3	TF	KOBEN	-	014 (016.5)	-2.6	10.7	-	+6000/-10000	-	-	RNP 1
4	TF	NOPLI	-	339 (342.1)	-2.6	11.9	-	-	-	-	RNP 1
5	TF	PATOM	-	305 (307.8)	-2.6	12.4	-	-FL180	-	-	RNP 1
6	TF	MISEL	-	318 (320.7)	-2.6	13.9	-	-	-	-	RNP 1
7	TF	LUBET	-	318 (320.6)	-2.6	7.2	-	+FL180	-	-	RNP 1
Remarks	NIL										

RNP SID TULUB 2A (CCO)

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/ TCH(ft)	Navigation Specification
1	CF	OVASA	-	335 (338.1)	-2.6	8.0	-	+2500	-	-	RNP 1
2	TF	PARES	-	335 (338.1)	-2.6	4.5	-	-	-	-	RNP 1
3	TF	KOBEN	-	014 (016.5)	-2.6	10.7	-	+6000/-10000	-	-	RNP 1
4	TF	NOPLI	-	339 (342.1)	-2.6	11.9	-	-	-	-	RNP 1
5	TF	PATOM	-	305 (307.8)	-2.6	12.4	-	-FL180	-	-	RNP 1
6	TF	TULUB	-	295 (297.4)	-2.6	18.2	-	+FL180	-	-	RNP 1
Remarks	NIL										

WAYPOINT LIST

RNP SID LUBET 2A (CCO) /TULUB 2A (CCO)

Waypoint Identifier	Coordinates
OVASA	252455.76N 0513204.45E
PARES	252906.58N 0513013.12E
KOBEN	253921.98N 0513334.39E
NOPLI	255042.65N 0512931.11E
PATOM	255821.41N 0511836.36E
MISEL	260906.55N 0510850.78E
LUBET	261440.67N 0510346.54E
TULUB	260644.00N 0510041.00E

© QATAR CIVIL AVIATION AUTHORITY