
STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

DIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR SOUTH	120.675 / 119.150
DOHA APP WEST	119.725 / 125.125
HAMAD TWR WEST	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNP RWY 34L
ULIKA 2A (CCO)

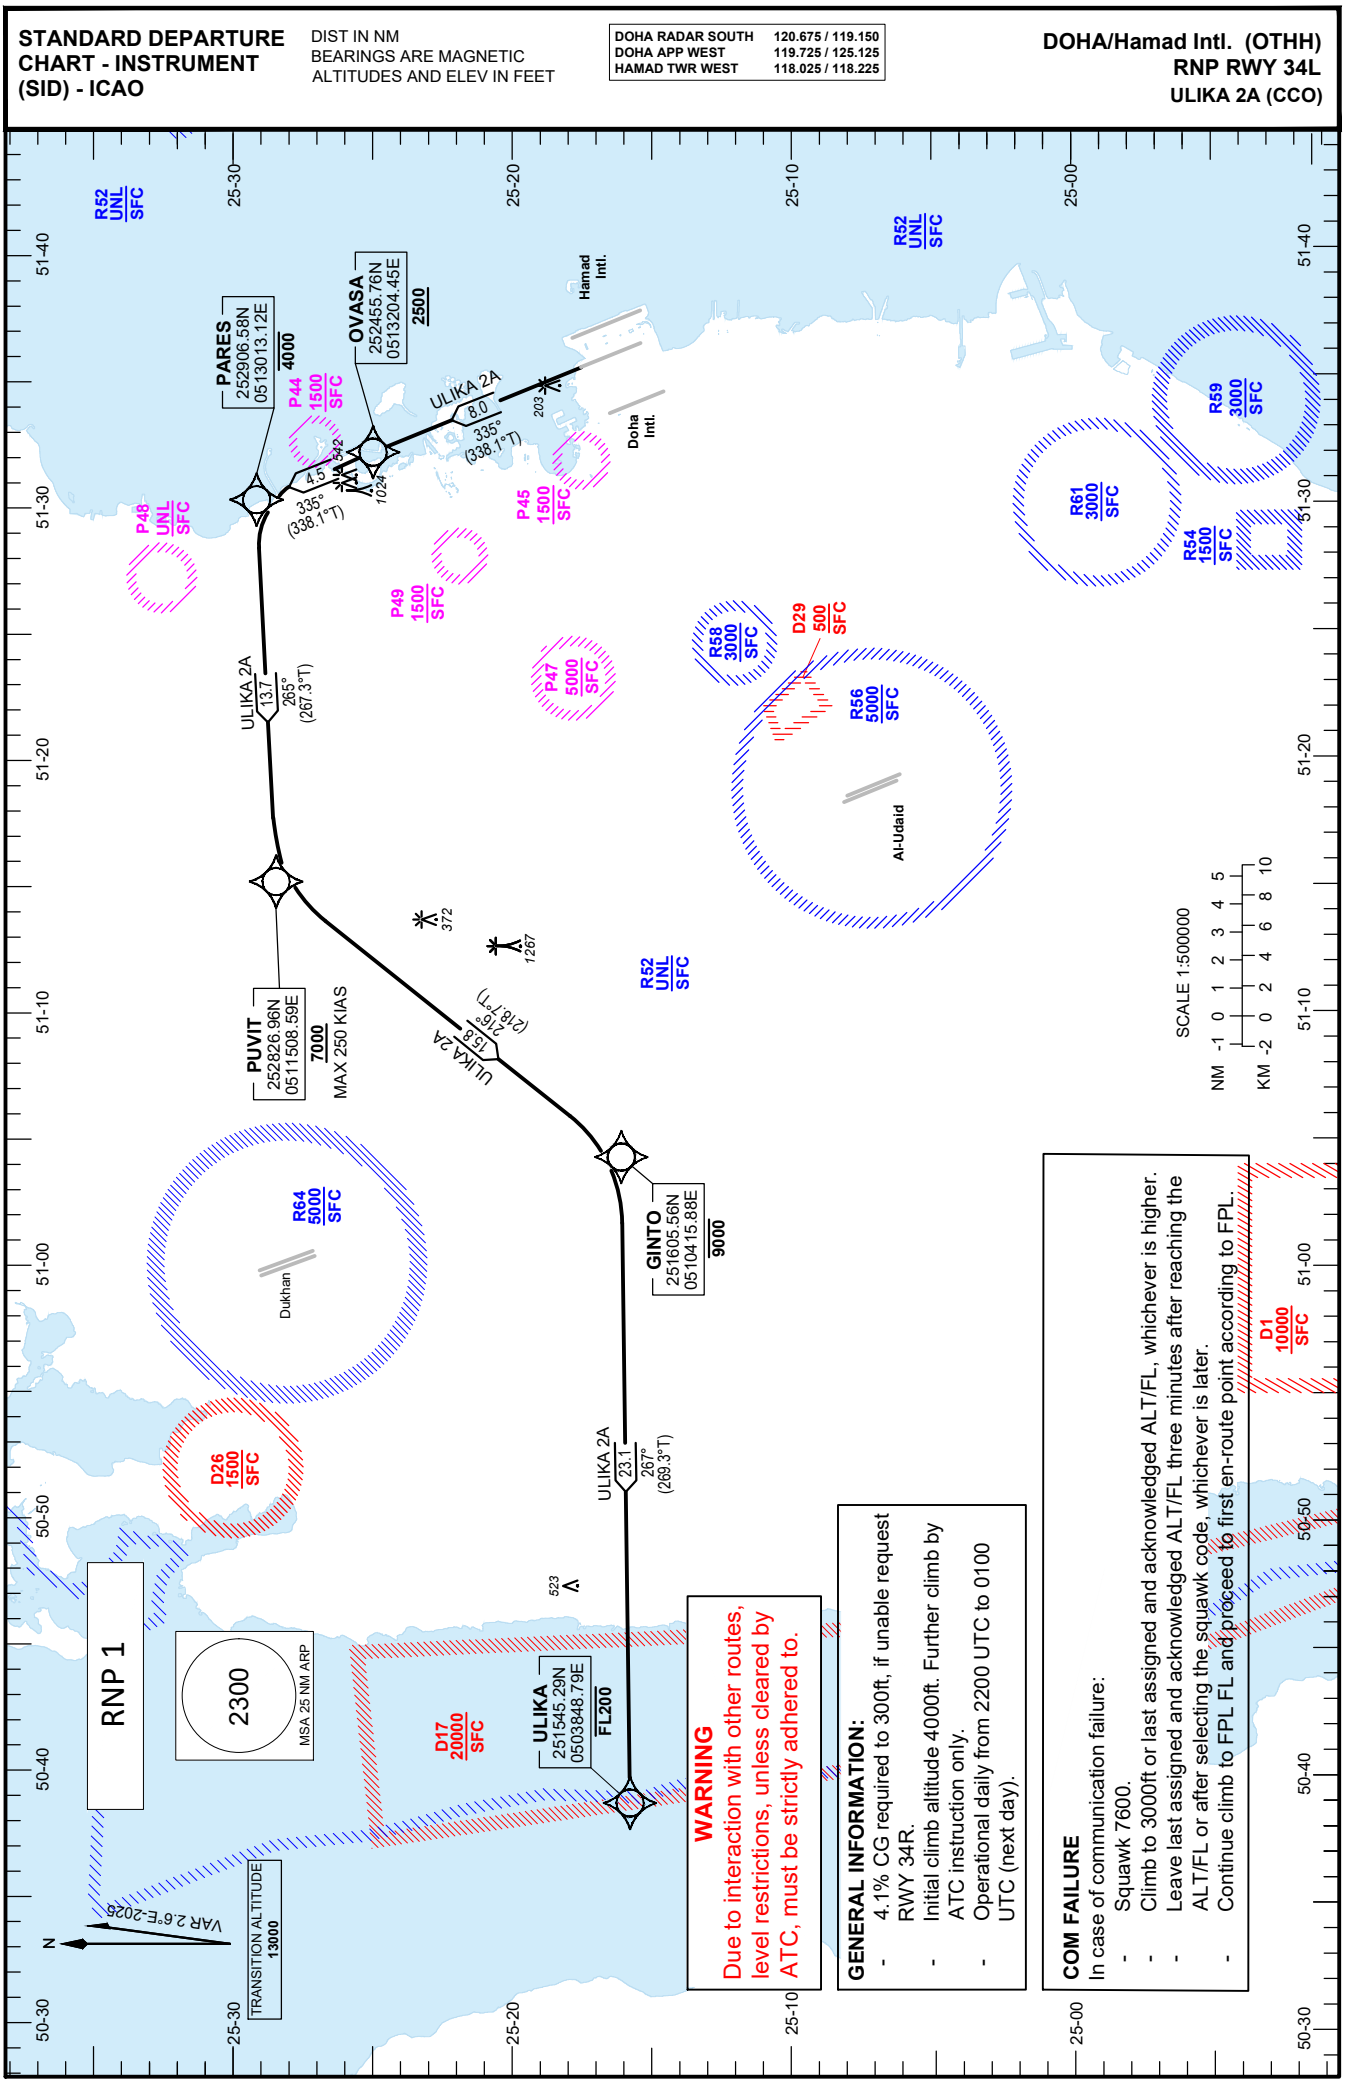

WARNING
Due to interaction with other routes, level restrictions, unless cleared by ATC, must be strictly adhered to.

GENERAL INFORMATION:
- 4.1% CG required to 300ft, if unable request RWY 34R.
- Initial climb altitude 4000ft. Further climb by ATC instruction only.
- Operational daily from 2200 UTC to 0100 UTC (next day).

COM FAILURE
In case of communication failure:
- Squawk 7600.
- Climb to 3000ft or last assigned and acknowledged ALT/FL, whichever is higher.
- Leave last assigned and acknowledged ALT/FL three minutes after reaching the ALT/FL or after selecting the squawk code, whichever is later.
- Continue climb to FPL FL and proceed to first en-route point according to FPL.

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

DOHA/Hamad Intl.(OTHH)
RNP RWY 34L
ULIKA 2A (CCO)

TABULAR DESCRIPTION

RNP SID ULIKA 2A (CCO)											
Serial Num	**Path Descriptor**	**Waypoint Identifier**	**Fly-over**	**Course °M(°T)**	**Magnetic Variation(°)**	**Distance (NM)**	**Turn Direction**	**Altitude (ft)**	**Speed (kt)**	**VPA(°)/ TCH(ft)**	**Navigation Specification**
1	CF	**OVASA**	-	335 (338.1)	-2.6	8.0	-	+2500	-	-	RNP 1
2	TF	**PARES**	-	335 (338.1)	-2.6	4.5	-	-4000	-	-	RNP 1
3	TF	**PUVIT**	-	265 (267.3)	-2.6	13.7	-	+7000	-250	-	RNP 1
4	TF	**GINTO**	-	216 (218.7)	-2.6	15.8	-	-9000	-	-	RNP 1
5	TF	**ULIKA**	-	267 (269.3)	-2.6	23.1	-	-FL200	-	-	RNP 1
Remarks		NIL									

WAYPOINT LIST

RNP SID ULIKA 2A (CCO)	
Waypoint Identifier	**Coordinates**
OVASA	252455.76N 0513204.45E
PARES	252906.58N 0513013.12E
PUVIT	252826.96N 0511508.59E
GINTO	251605.56N 0510415.88E
ULIKA	251545.29N 0503848.79E

© QATAR CIVIL AVIATION AUTHORITY