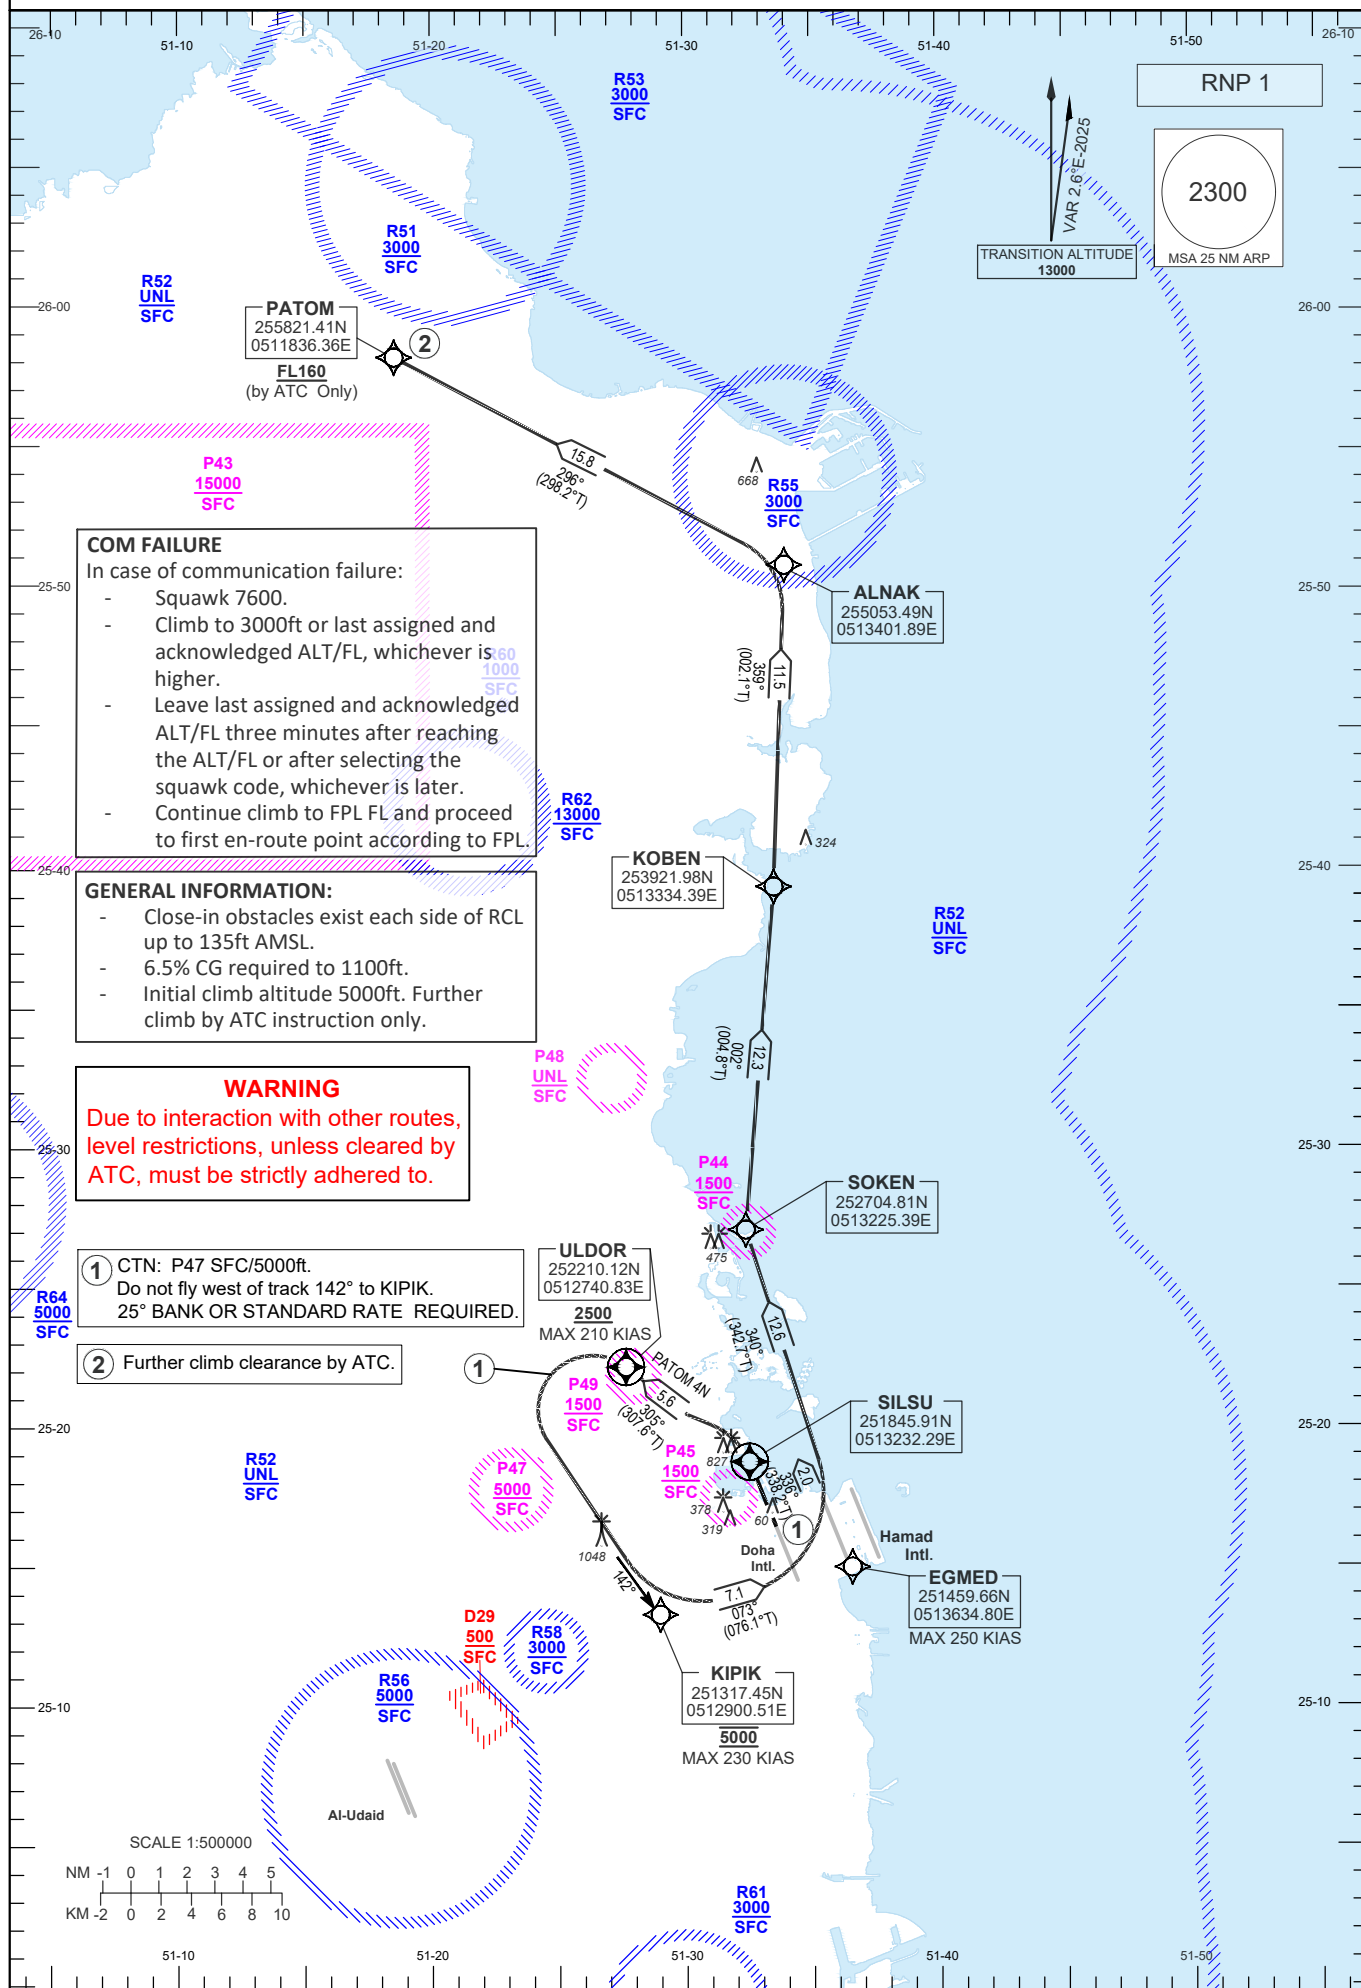


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR NORTH 121.100 / 121.625
DOHA APP WEST 119.725 / 125.125
DOHA TWR 118.900 / 119.025DOHA/Doha Intl. (OTBD)
RNP RWY 33
PATOM 4N

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

DOHA/Doha Intl. (OTBD)
RNP RWY 33
PATOM 4N

TABULAR DESCRIPTION

RNP SID PATOM 4N											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	SILSU	Y	336 (338.2)	-2.6	2.0	-	-	-	-	RNP 1
2	CF	ULDOR	Y	305 (307.6)	-2.6	5.6	-	+2500	-210	-	RNP 1
3	DF	KIPIK	-	-	-2.6	-	L	@5000	-230	-	RNP 1
4	TF	EGMED	-	073 (076.1)	-2.6	7.1	-	-	-250	-	RNP 1
5	TF	SOKEN	-	340 (342.7)	-2.6	12.6	-	-	-	-	RNP 1
6	TF	KOBEN	-	002 (004.8)	-2.6	12.3	-	-	-	-	RNP 1
7	TF	ALNAK	-	359 (002.1)	-2.6	11.5	-	-	-	-	RNP 1
8	TF	PATOM	-	296 (298.2)	-2.6	15.8	-	+FL160	-	-	RNP 1
Remarks		PATOM +FL160 by ATC only									

WAYPOINT LIST

RNP SID PATOM 4N	
Waypoint Identifier	Coordinates
SILSU	251845.91N 0513232.29E
ULDOR	252210.12N 0512740.83E
KIPIK	251317.45N 0512900.51E
EGMED	251459.66N 0513634.80E
SOKEN	252704.81N 0513225.39E
KOBEN	253921.98N 0513334.39E
ALNAK	255053.49N 0513401.89E
PATOM	255821.41N 0511836.36E