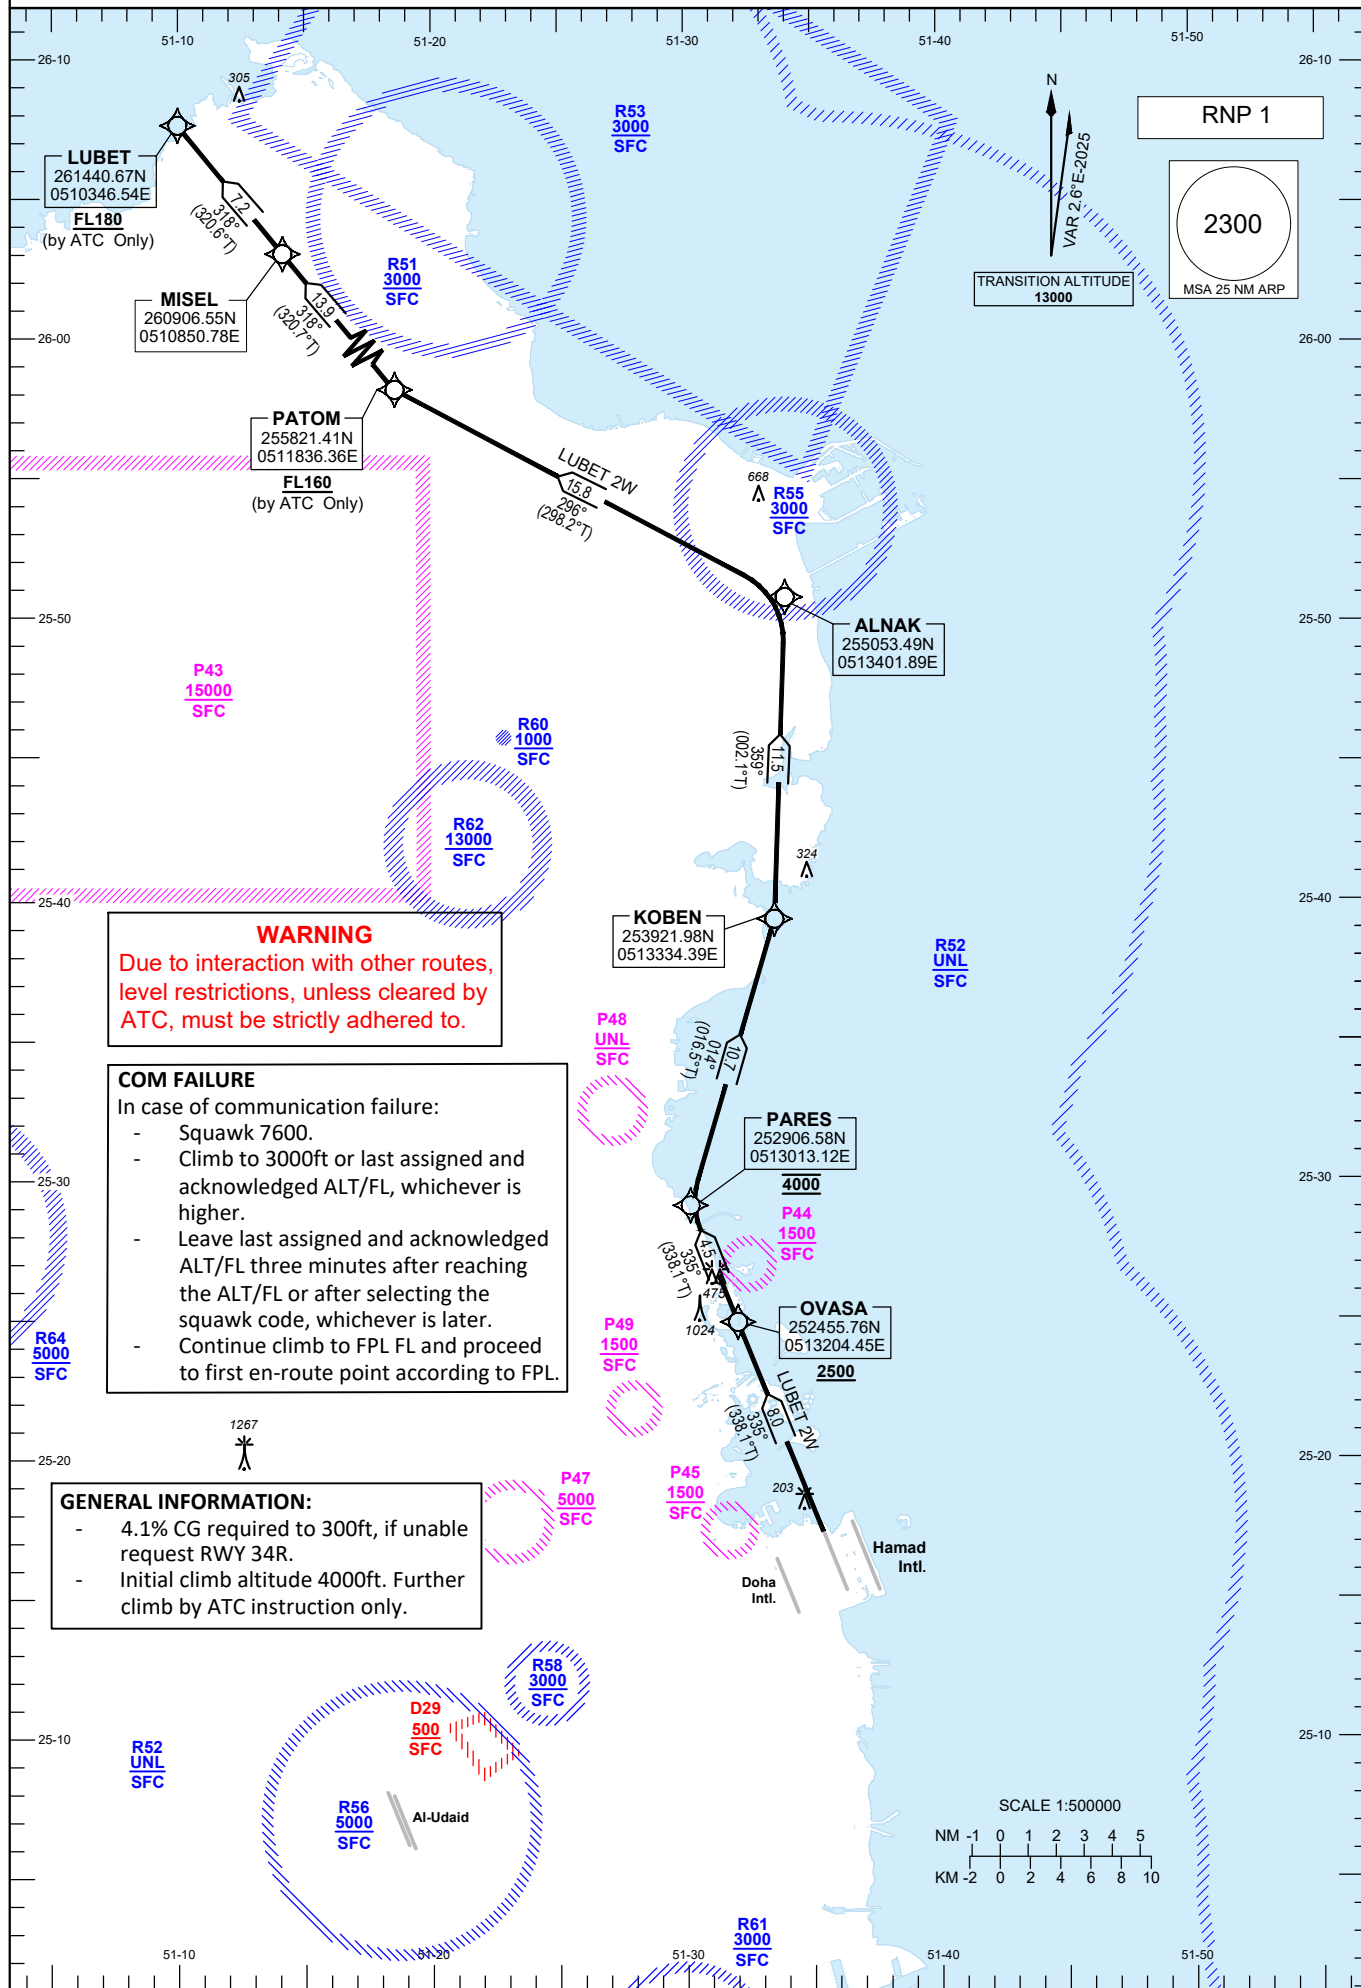


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR NORTH 121.100 / 121.625
DOHA APP WEST 119.725 / 125.125
HAMAD TWR WEST 118.025 / 118.225DOHA/Hamad Intl. (OTHH)
RNP RWY 34L
LUBET 2W

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

DOHA/Hamad Intl.(OTHH)
RNP RWY 34L
LUBET 2W

TABULAR DESCRIPTION

RNP SID LUBET 2W											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	OVASA	-	335 (338.1)	-2.6	8.0	-	+2500	-	-	RNP 1
2	TF	PARES	-	335 (338.1)	-2.6	4.5	-	@4000	-	-	RNP 1
3	TF	KOBEN	-	014 (016.5)	-2.6	10.7	-	-	-	-	RNP 1
4	TF	ALNAK	-	359 (002.1)	-2.6	11.5	-	-	-	-	RNP 1
5	TF	PATOM	-	296 (298.2)	-2.6	15.8	-	+FL160	-	-	RNP 1
6	TF	MISEL	-	318 (320.7)	-2.6	13.9	-	-	-	-	RNP 1
7	TF	LUBET	-	318 (320.6)	-2.6	7.2	-	+FL180	-	-	RNP 1
Remarks		LUBET at FL180 or above and PATOM at FL160 or above by ATC only									

WAYPOINT LIST

RNP SID LUBET 2W	
Waypoint Identifier	Coordinates
OVASA	252455.76N 0513204.45E
PARES	252906.58N 0513013.12E
KOBEN	253921.98N 0513334.39E
ALNAK	255053.49N 0513401.89E
PATOM	255821.41N 0511836.36E
MISEL	260906.55N 0510850.78E
LUBET	261440.67N 0510346.54E