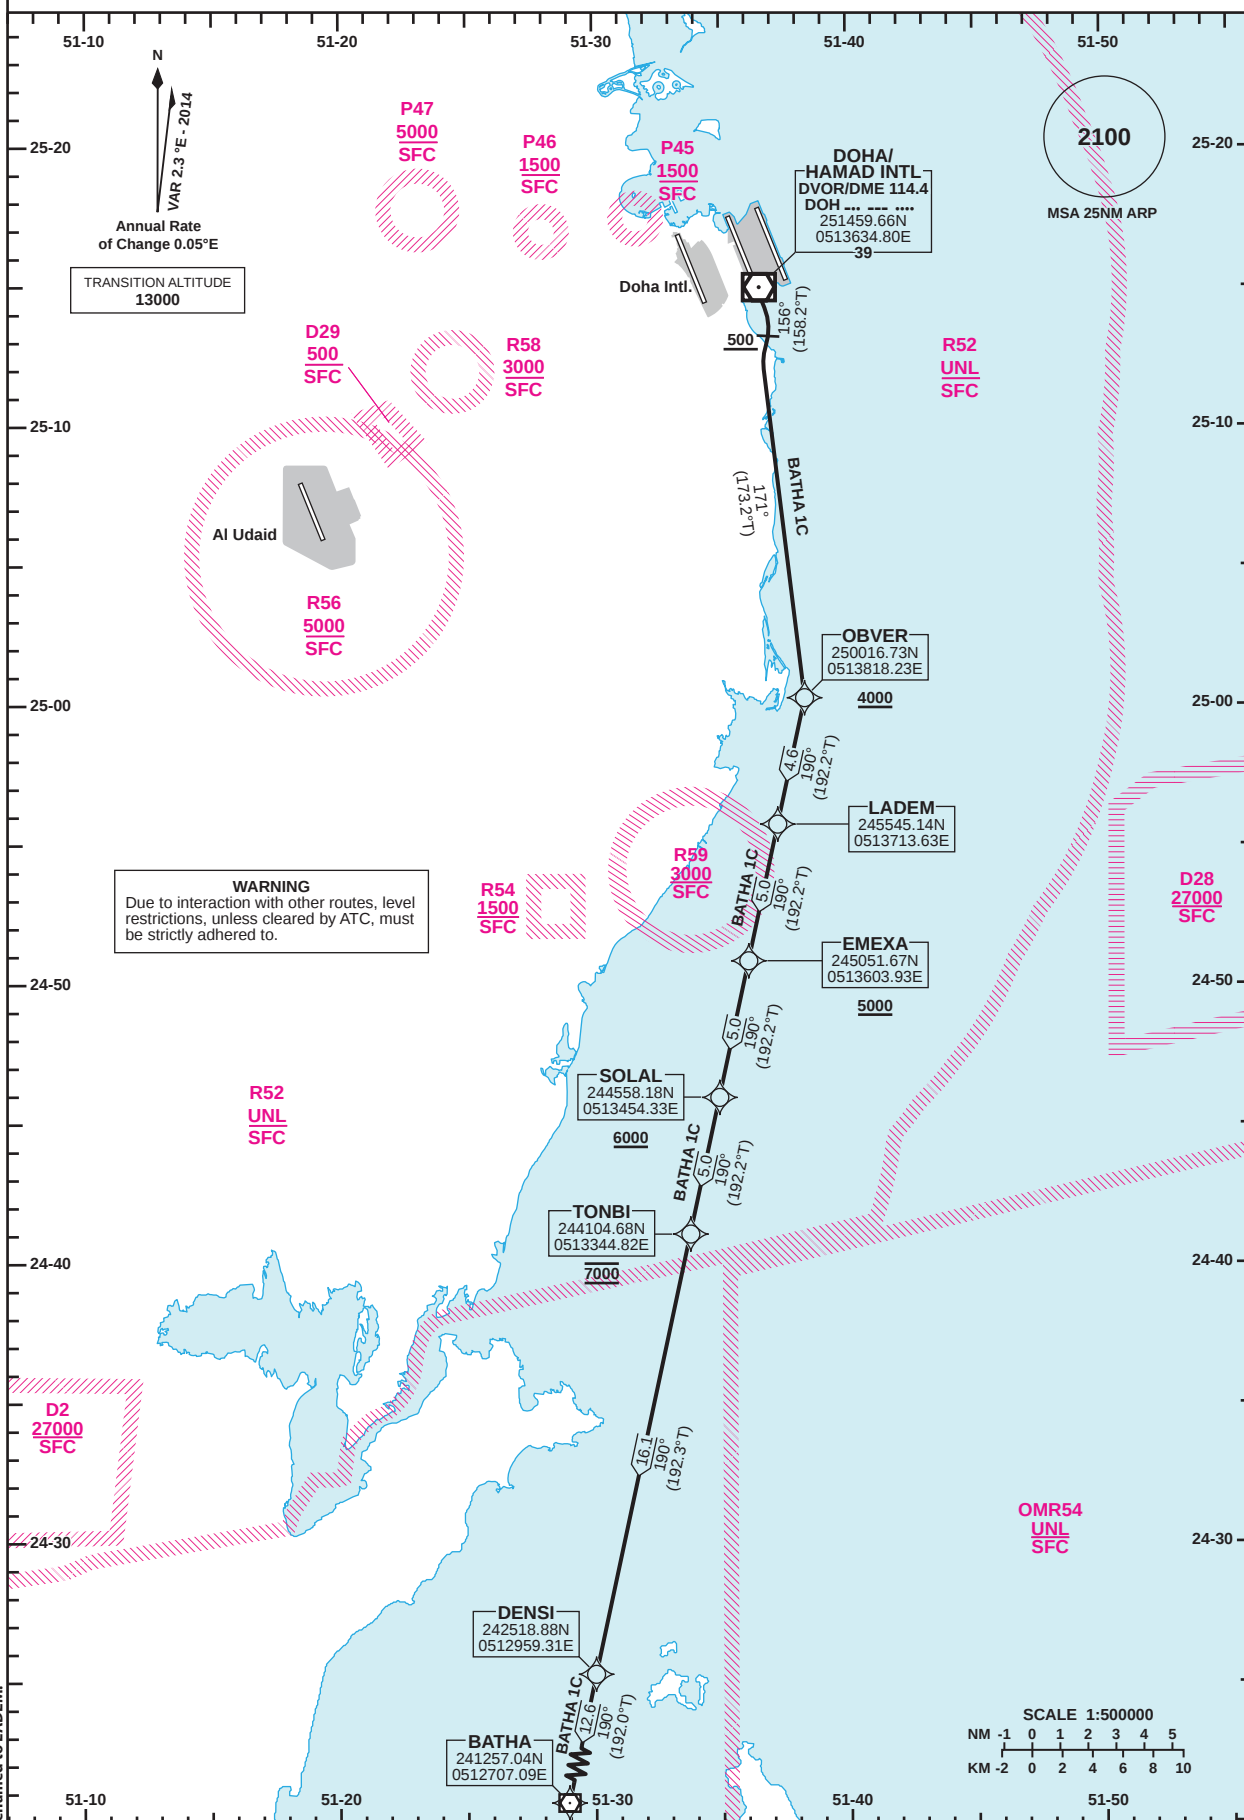


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
TWR (EAST)	118.525 / 118.225
TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNAV RWY 16R
BATHA 1C

Route Designator	Routing
BATHA 1C	[T158.2;A500+] - OBVER [T173.2;A4000+] - LADEM - EMEXA [A5000+] - SOLAL [A6000+] - TONBI [A7000] - DENSI - BATHA

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 16R departures.
2. 3.5% CG required to 600.

Amendment: PASOM renamed to LADEM.

Standard Instrument Departure Coding Table

HAMAD INTERNATIONAL RNAV Standard Instrument Departure BATHA 1C

OTHH RNAV SID BATHA 1C

Serial Num	PT	WPT	Flyover	Course(T)	Magnetic Variation	Dist(NM)	Turn Direction	Altitude Description	Speed Limit	THR Elev TCH (ft)	VPA (°)	Arc Center Wpt Ident/radius (NM)	Navigational Performance
1	CA		-	156 (158.2)	2.3	-		+500					RNP1.0
2	CF	OBVER	-	171 (173.2)	2.3	-		+4000					RNP1.0
3	TF	LADEM	-	190 (192.2)	2.3	4.6		-					RNP1.0
4	TF	EMEXA	-	190 (192.2)	2.3	5.0		+5000					RNP1.0
5	TF	SOLAL	-	190 (192.2)	2.3	5.0		+6000					RNP1.0
6	TF	TONBI	-	190 (192.2)	2.3	5.0		@7000					RNP1.0
7	TF	DENSI	-	190 (192.3)	2.3	16.1		-					RNP1.0
8	TF	BATHA	-	190 (192.0)	2.3	12.6		-					RNP1.0