
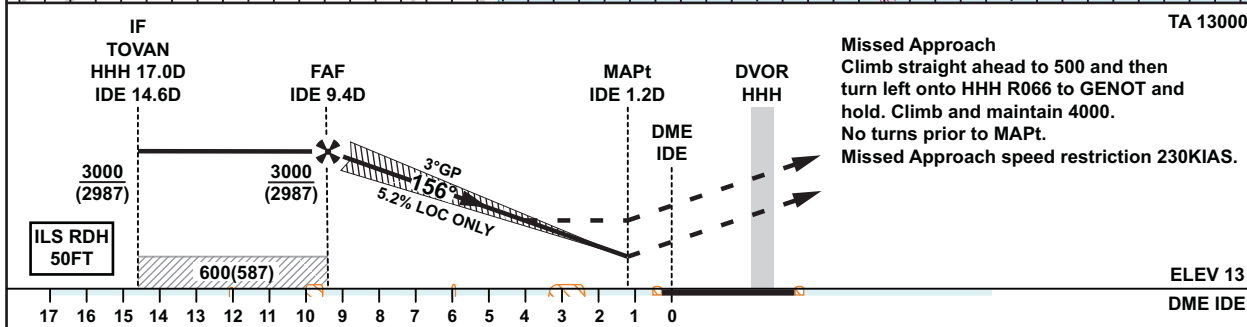


INSTRUMENT APPROACH CHART - ICAO **AD ELEV 13**
HEIGHTS RELATED TO THR RWY 16L

DOHA RADAR 121.10
DOHA APP 119.725 / 120.60
DIRECTOR 119.40 / 121.125
TWR (EAST) 118.525 / 118.225
TWR (WEST) 118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
ILS RWY 16L
ACFT CAT A,B,C,D

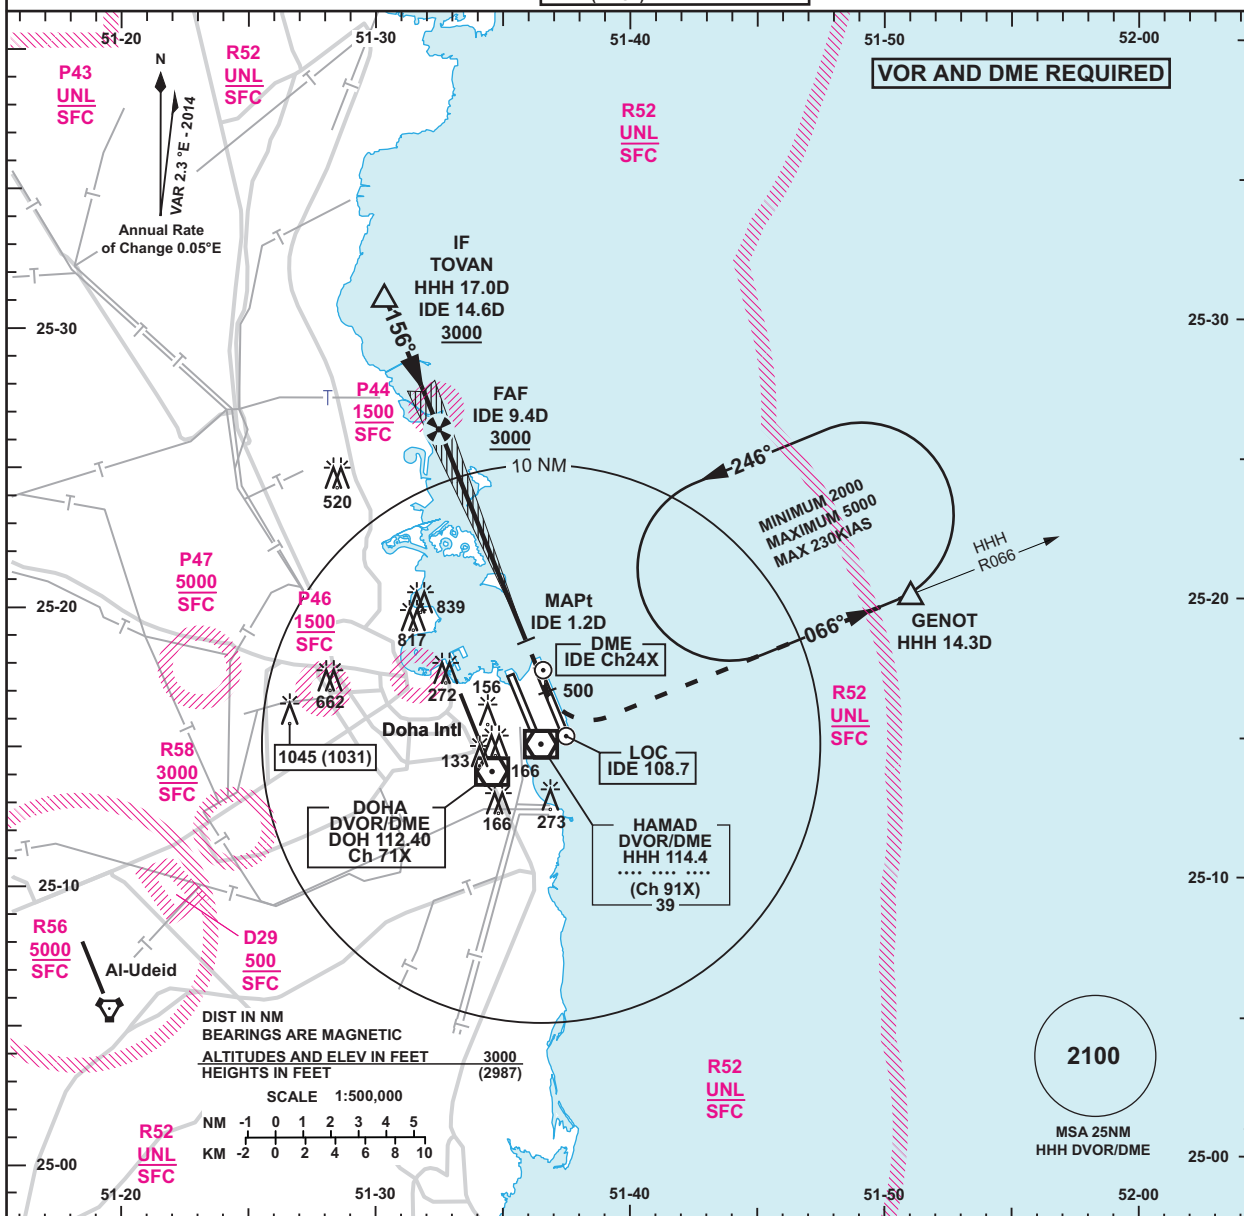

		DME ALT (5.2%)														
		9	8	7	6	5	4	3	2							
		2880	2570	2250	1930	1610	1290	980	660							
OCA (OCH)		A			B			C		D						
Straight in Approach	ILS CAT I	180 (167)			192 (179)			205 (192)		220 (207)						
	ILS CAT II	83 (70)			95 (82)			109 (96)		129 (116)						
	LOC ONLY	370 (357)														
Circling		620 (607)					1240 (1227)									
1. IDE DME zero ranged to TDZ. 2. CAT IIIA and CAT IIIB APPROVED 3. HOLD at GENOT protected for sector 3 Entry only.							LOC only Approach: MAPt at IDE 1.2D									
							Speed		KT		80	100	120	140	160	180
							Time		MIN:SEC		Timing Not Authorized					
							Rate of Descent		FT/MIN		420	530	640	740	850	960