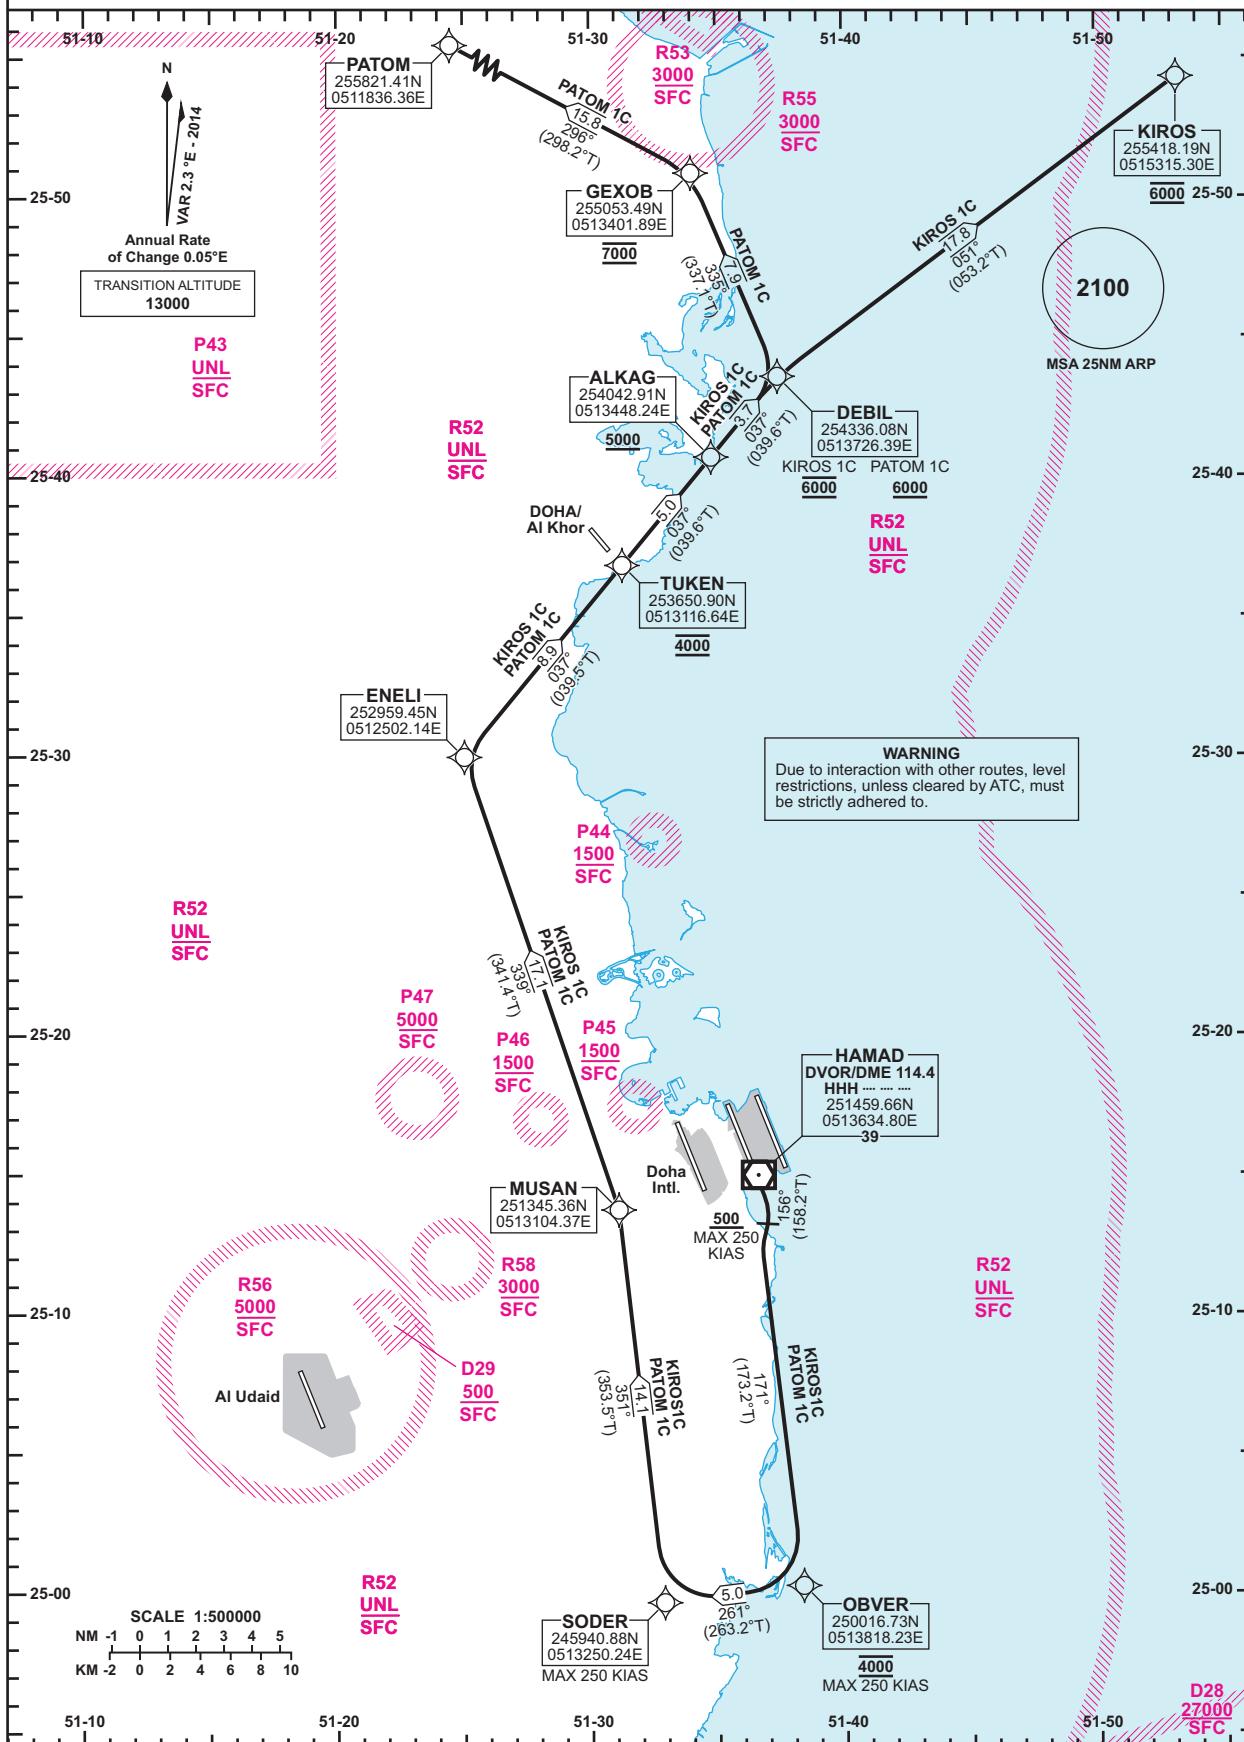


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR 121.10
DOHA APP 119.725 / 120.60
TWR (EAST) 118.525 / 118.225
TWR (WEST) 118.025 / 118.225DOHA/Hamad Intl. (OTHH)
RNAV RWY 16R
KIROS 1C /PATOM 1C

Route Designator	Routing
KIROS 1C	[T158.2;A500+;K250-] - OBVER[R;T173.2;A4000;K250-] - SODER[R;K250-] - MUSAN - ENELI - TUKEN[A4000] - ALKAG[A5000+] - DEBIL[A6000] - KIROS[A6000]
PATOM 1C	[T158.2;A500+;K250-] - OBVER[R;T173.2;A4000;K250-] - SODER[R;K250-] - MUSAN - ENELI - TUKEN[A4000] - ALKAG[A5000+] - DEBIL[A6000+] - GEXOB[A7000] - PATOM

GENERAL INFORMATION

- Close-in obstacles exist for Rwy 16R departures.
- 3.5% CG required to 600.