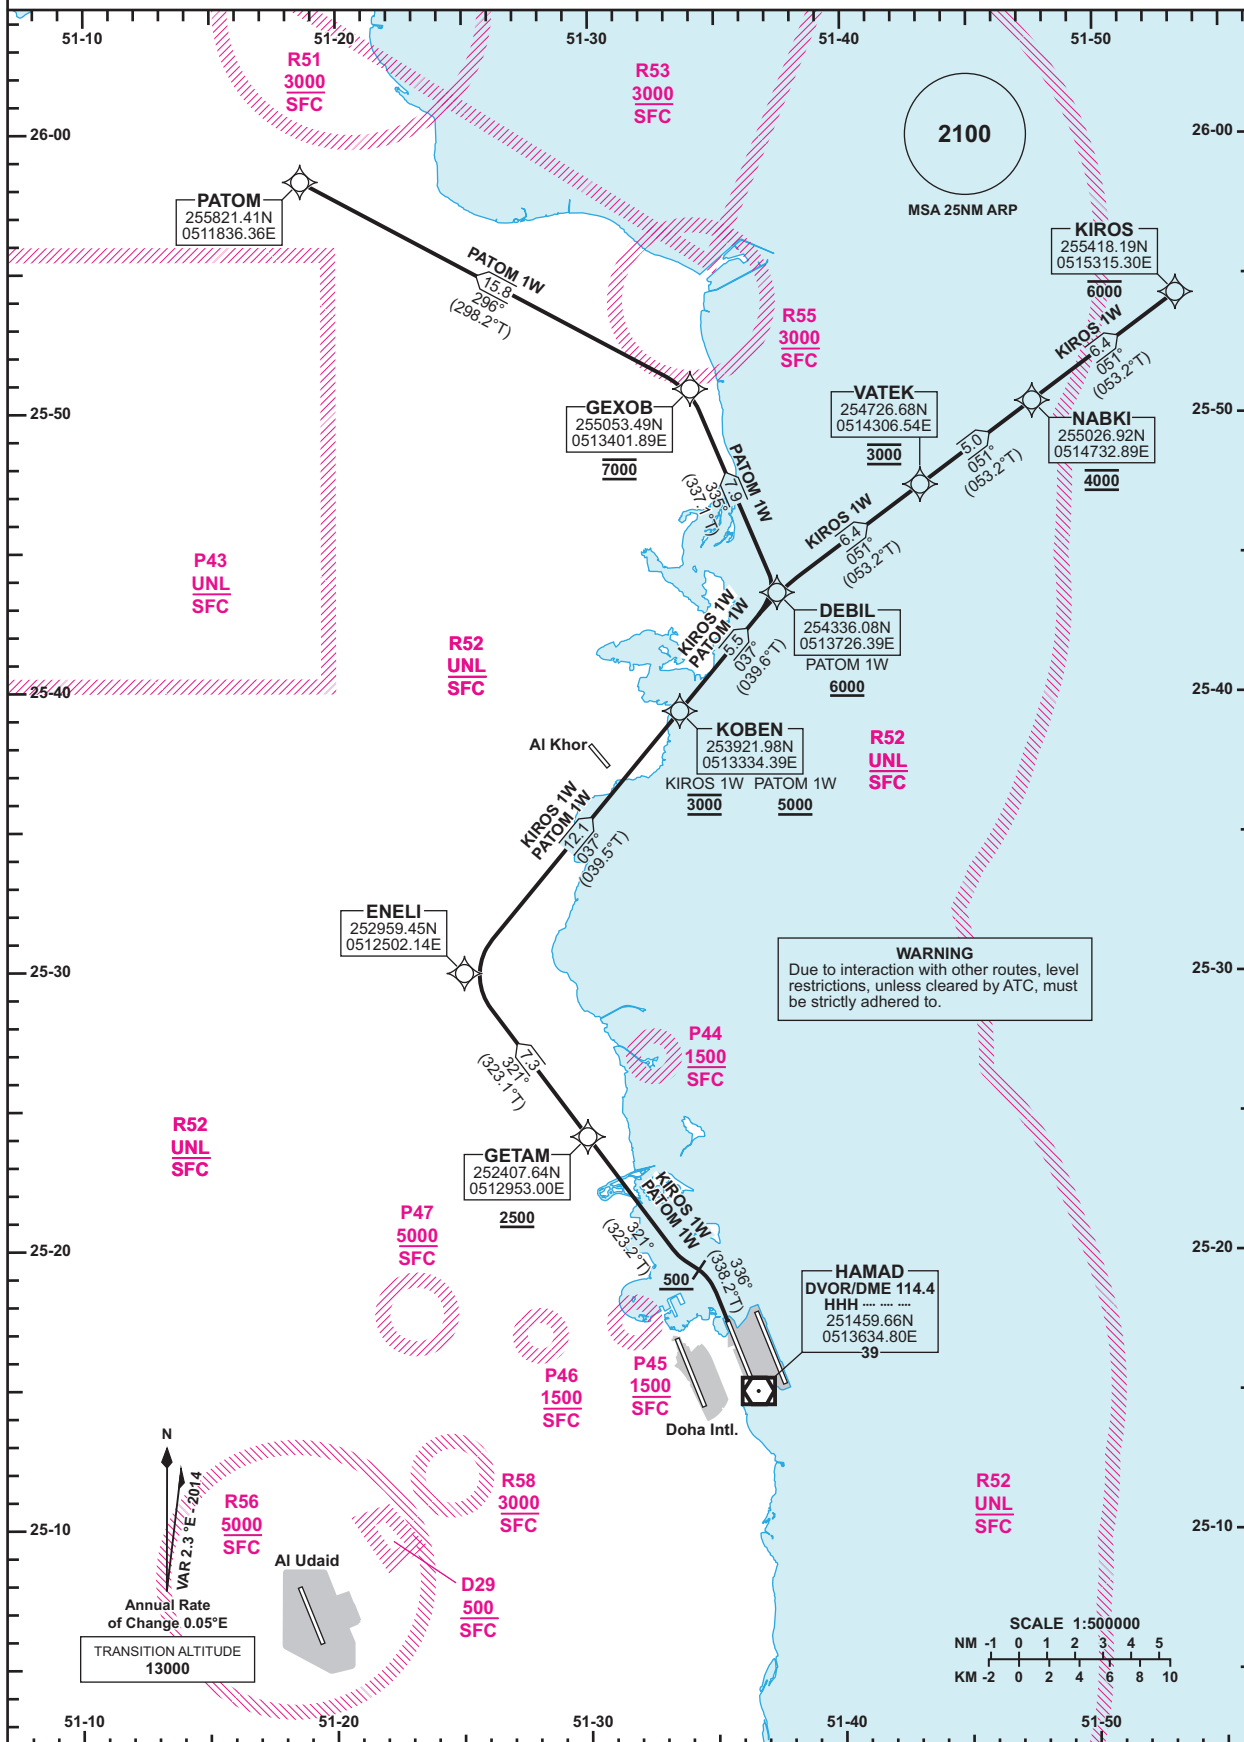


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
TWR (EAST)	118.525 / 118.225
TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
RNAV RWY 34L
KIROS 1W /PATOM 1W

Route Designator	Routing
KIROS 1W	[T338.2; A500+] - GETAM[T323.2; A2500+] - ENELI - KOBEN[A3000] - DEBIL - VATEK[A3000] - NABKI[A4000] - KIROS[A6000]
PATOM 1W	[T338.2; A500+] - GETAM[T323.2; A2500+] - ENELI - KOBEN[A5000+] - DEBIL[A6000+] - GEXOB[A7000] - PATOM

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 34L departures.
2. 4.8% CG required to 1200.