


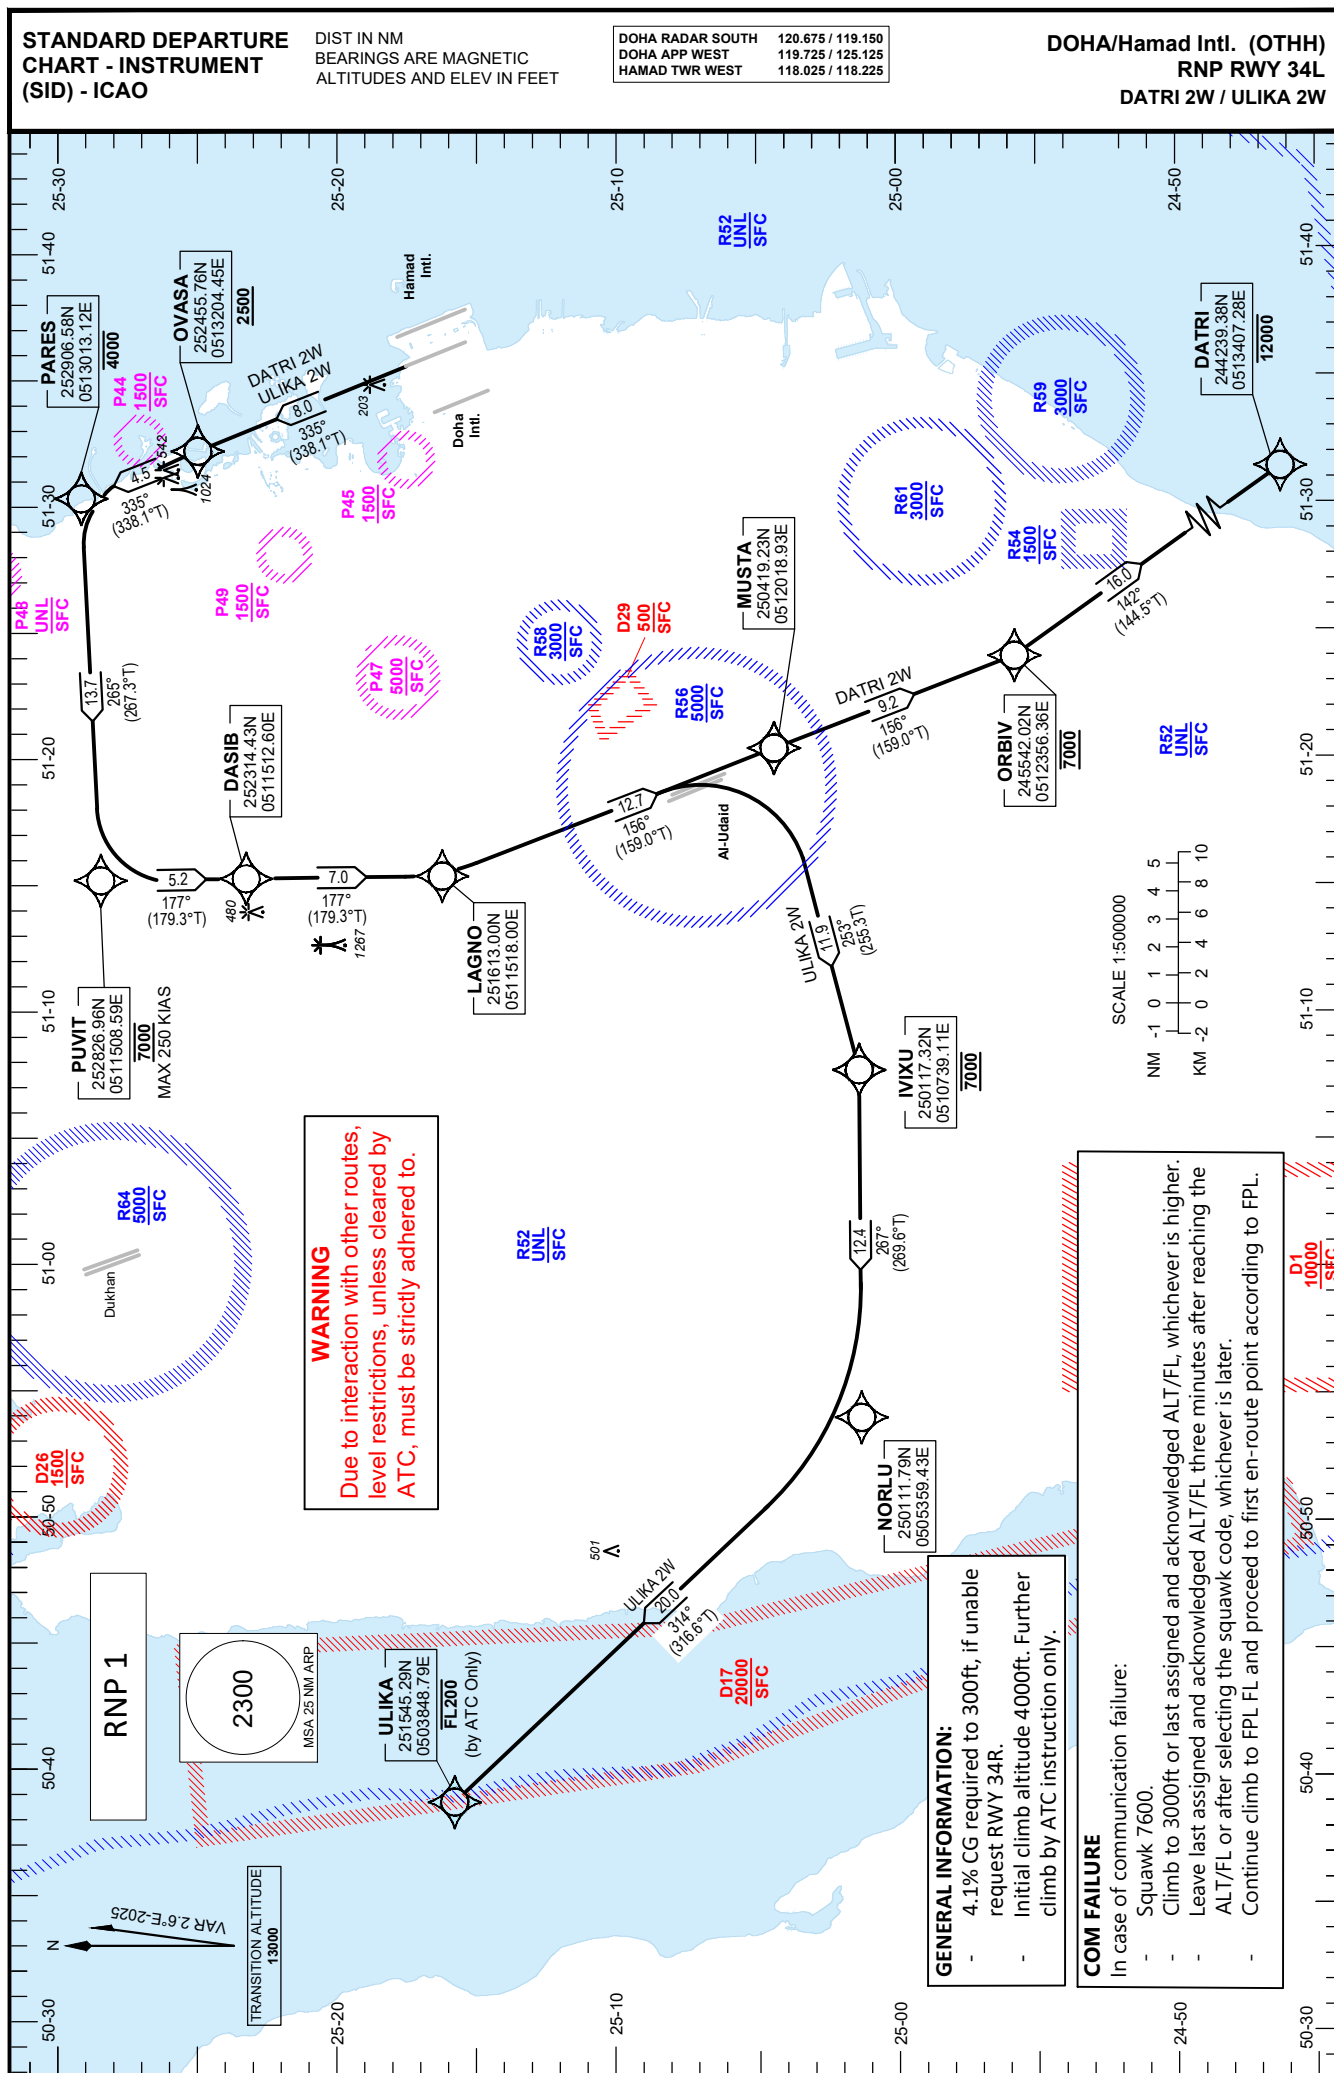

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODOHA/Hamad Intl.(OTHH)
RNP RWY 34L
DATRI 2W / ULIKA 2W

TABULAR DESCRIPTION

RNP SID DATRI 2W

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	OVASA	-	335 (338.1)	-2.6	8.0	-	+2500	-	-	RNP 1
2	TF	PARES	-	335 (338.1)	-2.6	4.5	-	-4000	-	-	RNP 1
3	TF	PUVIT	-	265 (267.3)	-2.6	13.7	-	@7000	-250	-	RNP 1
4	TF	DASIB	-	177 (179.3)	-2.6	5.2	-	-	-	-	RNP 1
5	TF	LAGNO	-	177 (179.3)	-2.6	7.0	-	-	-	-	RNP 1
6	TF	MUSTA	-	156 (159.0)	-2.6	12.7	-	-	-	-	RNP 1
7	TF	ORBIV	-	156 (159.0)	-2.6	9.2	-	@7000	-	-	RNP 1
8	TF	DATRI	-	142 (144.5)	-2.6	16.0	-	-12000	-	-	RNP 1
Remarks		NIL									

RNP SID ULIKA 2W

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	OVASA	-	335 (338.1)	-2.6	8.0	-	+2500	-	-	RNP 1
2	TF	PARES	-	335 (338.1)	-2.6	4.5	-	-4000	-	-	RNP 1
3	TF	PUVIT	-	265 (267.3)	-2.6	13.7	-	@7000	-250	-	RNP 1
4	TF	DASIB	-	177 (179.3)	-2.6	5.2	-	-	-	-	RNP 1
5	TF	LAGNO	-	177 (179.3)	-2.6	7.0	-	-	-	-	RNP 1
6	TF	MUSTA	-	156 (159.0)	-2.6	12.7	-	-	-	-	RNP 1
7	TF	IVIXU	-	253 (255.3)	-2.6	11.9	-	@7000	-	-	RNP 1
8	TF	NORLU	-	267 (269.6)	-2.6	12.4	-	-	-	-	RNP 1
9	TF	ULIKA	-	314 (316.6)	-2.6	20.0	-	-FL200	-	-	RNP 1
Remarks		ULIKA -FL200 by ATC only									

WAYPOINT LIST

RNP SID DATRI 2W / ULIKA 2W

Waypoint Identifier	Coordinates
OVASA	252455.76N 0513204.45E
PARES	252906.58N 0513013.12E
PUVIT	252826.96N 0511508.59E
DASIB	252314.43N 0511512.60E
LAGNO	251613.00N 0511518.00E
MUSTA	250419.23N 0512018.93E
ORBIV	245542.02N 0512356.36E
DATRI	244239.38N 0513407.28E
IVIXU	250117.32N 0510739.11E
NORLU	250111.79N 0505359.43E
ULIKA	251545.29N 0503848.79E