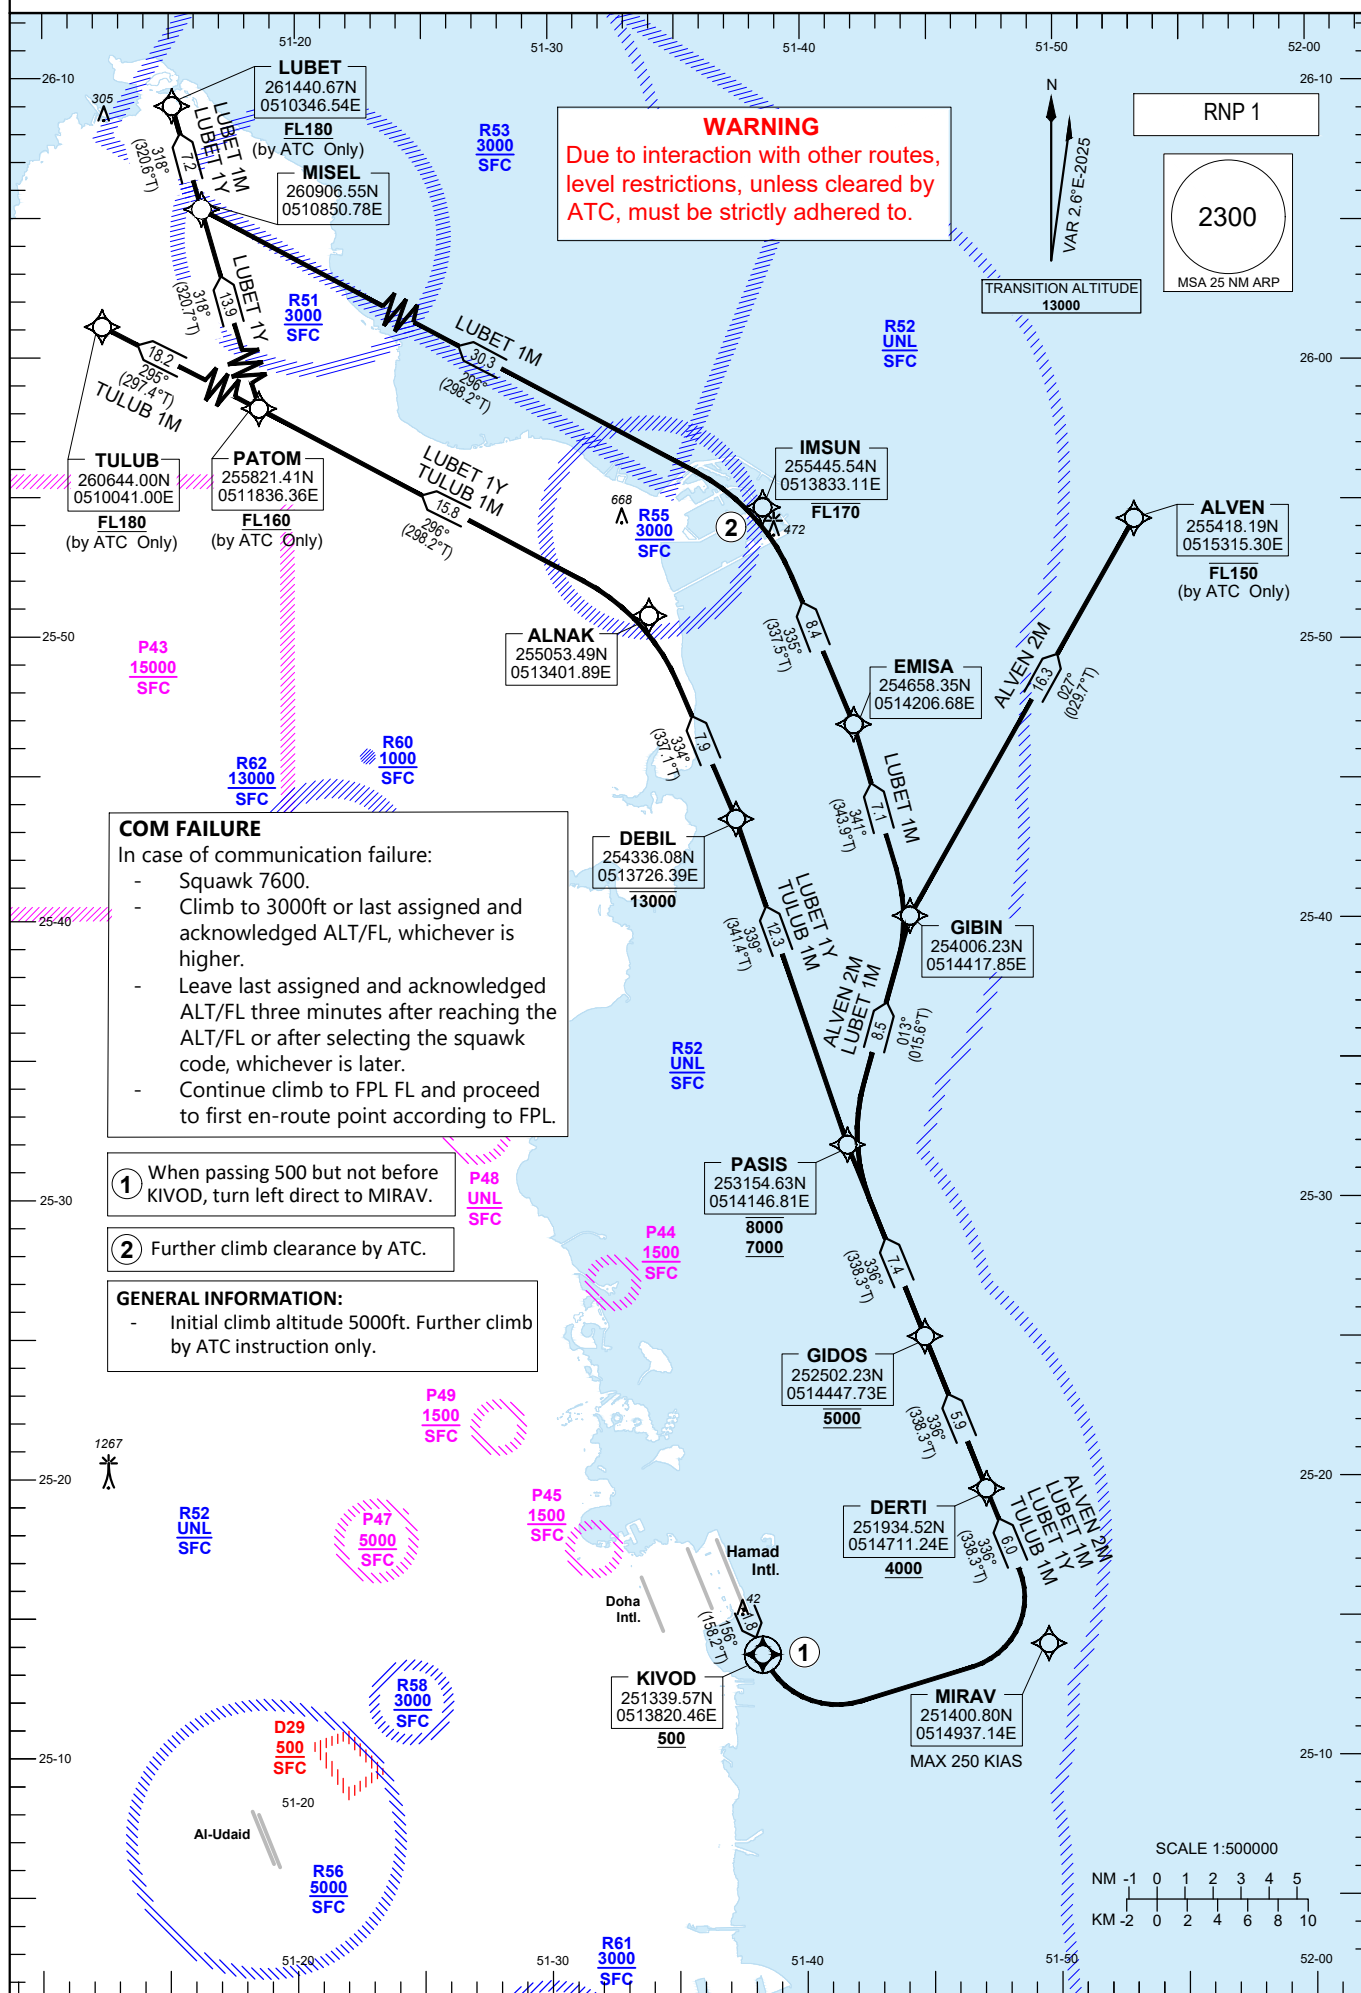


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEET

DOHA RADAR NORTH	121.100 / 121.625
DOHA RADAR SOUTH	120.675 / 119.150
DOHA APP WEST	119.725 / 125.125
DOHA APP EAST	124.775 / 120.600
HAMAD TWR EAST	118.525 / 118.225

DOHA/Hamad Intl. (OTHH)
RNP RWY 16L
ALVEN 2M / LUBET 1M / LUBET 1Y /
TULUB 1M

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODOHA/Hamad Intl.(OTHH)
RNP RWY 16L
ALVEN 2M / LUBET 1M / LUBET 1Y / TULUB 1M

TABULAR DESCRIPTION

RNP SID ALVEN 2M

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	KIVOD	Y	156 (158.2)	-2.6	1.8	-	-	-	-	RNP 1
2	CA	-	-	156 (158.2)	-2.6	-	-	+500	-	-	RNP 1
3	DF	MIRAV	-	-	-2.6	-	L	-	-250	-	RNP 1
4	TF	DERTI	-	336 (338.3)	-2.6	6.0	-	+4000	-	-	RNP 1
5	TF	GIDOS	-	336 (338.3)	-2.6	5.9	-	@5000	-	-	RNP 1
6	TF	PASIS	-	336 (338.3)	-2.6	7.4	-	-8000/+7000	-	-	RNP 1
7	TF	GIBIN	-	013 (015.6)	-2.6	8.5	-	-	-	-	RNP 1
8	TF	ALVEN	-	027 (029.7)	-2.6	16.3	-	-FL150	-	-	RNP 1

Remarks ALVEN -FL150 by ATC only

RNP SID LUBET 1M

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	KIVOD	Y	156 (158.2)	-2.6	1.8	-	-	-	-	RNP 1
2	CA	-	-	156 (158.2)	-2.6	-	-	+500	-	-	RNP 1
3	DF	MIRAV	-	-	-2.6	-	L	-	-250	-	RNP 1
4	TF	DERTI	-	336 (338.3)	-2.6	6.0	-	+4000	-	-	RNP 1
5	TF	GIDOS	-	336 (338.3)	-2.6	5.9	-	@5000	-	-	RNP 1
6	TF	PASIS	-	336 (338.3)	-2.6	7.4	-	-8000/+7000	-	-	RNP 1
7	TF	GIBIN	-	013 (015.6)	-2.6	8.5	-	-	-	-	RNP 1
8	TF	EMISA	-	341 (343.9)	-2.6	7.1	-	-	-	-	RNP 1
9	TF	IMSUN	-	335 (337.5)	-2.6	8.4	-	-FL170	-	-	RNP 1
10	TF	MISEL	-	296 (298.2)	-2.6	30.3	-	-	-	-	RNP 1
11	TF	LUBET	-	318 (320.6)	-2.6	7.2	-	+FL180	-	-	RNP 1

Remarks LUBET +FL180 by ATC only

RNP SID LUBET 1Y

Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	KIVOD	Y	156 (158.2)	-2.6	1.8	-	-	-	-	RNP 1
2	CA	-	-	156 (158.2)	-2.6	-	-	+500	-	-	RNP 1
3	DF	MIRAV	-	-	-2.6	-	L	-	-250	-	RNP 1
4	TF	DERTI	-	336 (338.3)	-2.6	6.0	-	+4000	-	-	RNP 1
5	TF	GIDOS	-	336 (338.3)	-2.6	5.9	-	@5000	-	-	RNP 1
6	TF	PASIS	-	336 (338.3)	-2.6	7.4	-	-8000/+7000	-	-	RNP 1
7	TF	DEBIL	-	339 (341.4)	-2.6	12.3	-	-13000	-	-	RNP 1
8	TF	ALNAK	-	334 (337.1)	-2.6	7.9	-	-	-	-	RNP 1
9	TF	PATOM	-	296 (298.2)	-2.6	15.8	-	+FL160	-	-	RNP 1
10	TF	MISEL	-	318 (320.7)	-2.6	13.9	-	-	-	-	RNP 1
11	TF	LUBET	-	318 (320.6)	-2.6	7.2	-	+FL180	-	-	RNP 1

Remarks PATOM +FL160 and LUBET +FL180 by ATC only

RNP SID TULUB 1M											
Serial Num	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation(°)	Distance (NM)	Turn Direction	Altitude (ft)	Speed (kt)	VPA(°)/TCH(ft)	Navigation Specification
1	CF	KIVOD	Y	156 (158.2)	-2.6	1.8	-	-	-	-	RNP 1
2	CA	-	-	156 (158.2)	-2.6	-	-	+500	-	-	RNP 1
3	DF	MIRAV	-	-	-2.6	-	L	-	-250	-	RNP 1
4	TF	DERTI	-	336 (338.3)	-2.6	6.0	-	+4000	-	-	RNP 1
5	TF	GIDOS	-	336 (338.3)	-2.6	5.9	-	@5000	-	-	RNP 1
6	TF	PASIS	-	336 (338.3)	-2.6	7.4	-	-8000/+7000	-	-	RNP 1
7	TF	DEBIL	-	339 (341.4)	-2.6	12.3	-	-13000	-	-	RNP 1
8	TF	ALNAK	-	334 (337.1)	-2.6	7.9	-	-	-	-	RNP 1
9	TF	PATOM	-	296 (298.2)	-2.6	15.8	-	+FL160	-	-	RNP 1
10	TF	TULUB	-	295 (297.4)	-2.6	18.2	-	+FL180	-	-	RNP 1
Remarks		PATOM +FL160 and TULUB +FL180 by ATC only									

WAYPOINT LIST

RNP SID ALVEN 2M /LUBET 1M /LUBET 1Y /TULUB 1M	
Waypoint Identifier	Coordinates
KIVOD	251339.57N 0513820.46E
MIRAV	251400.80N 0514937.14E
DERTI	251934.52N 0514711.24E
GIDOS	252502.23N 0514447.73E
PASIS	253154.63N 0514146.81E
GIBIN	254006.23N 0514417.85E
ALVEN	255418.19N 0515315.30E

RNP SID ALVEN 2M /LUBET 1M /LUBET 1Y /TULUB 1M	
Waypoint Identifier	Coordinates
EMISA	254658.35N 0514206.68E
IMSUN	255445.54N 0513833.11E
MISEL	260906.55N 0510850.78E
LUBET	261440.67N 0510346.54E
DEBIL	254336.08N 0513726.39E
ALNAK	255053.49N 0513401.89E
PATOM	255821.41N 0511836.36E
TULUB	260644.00N 0510041.00E

Intentionally Left Blank