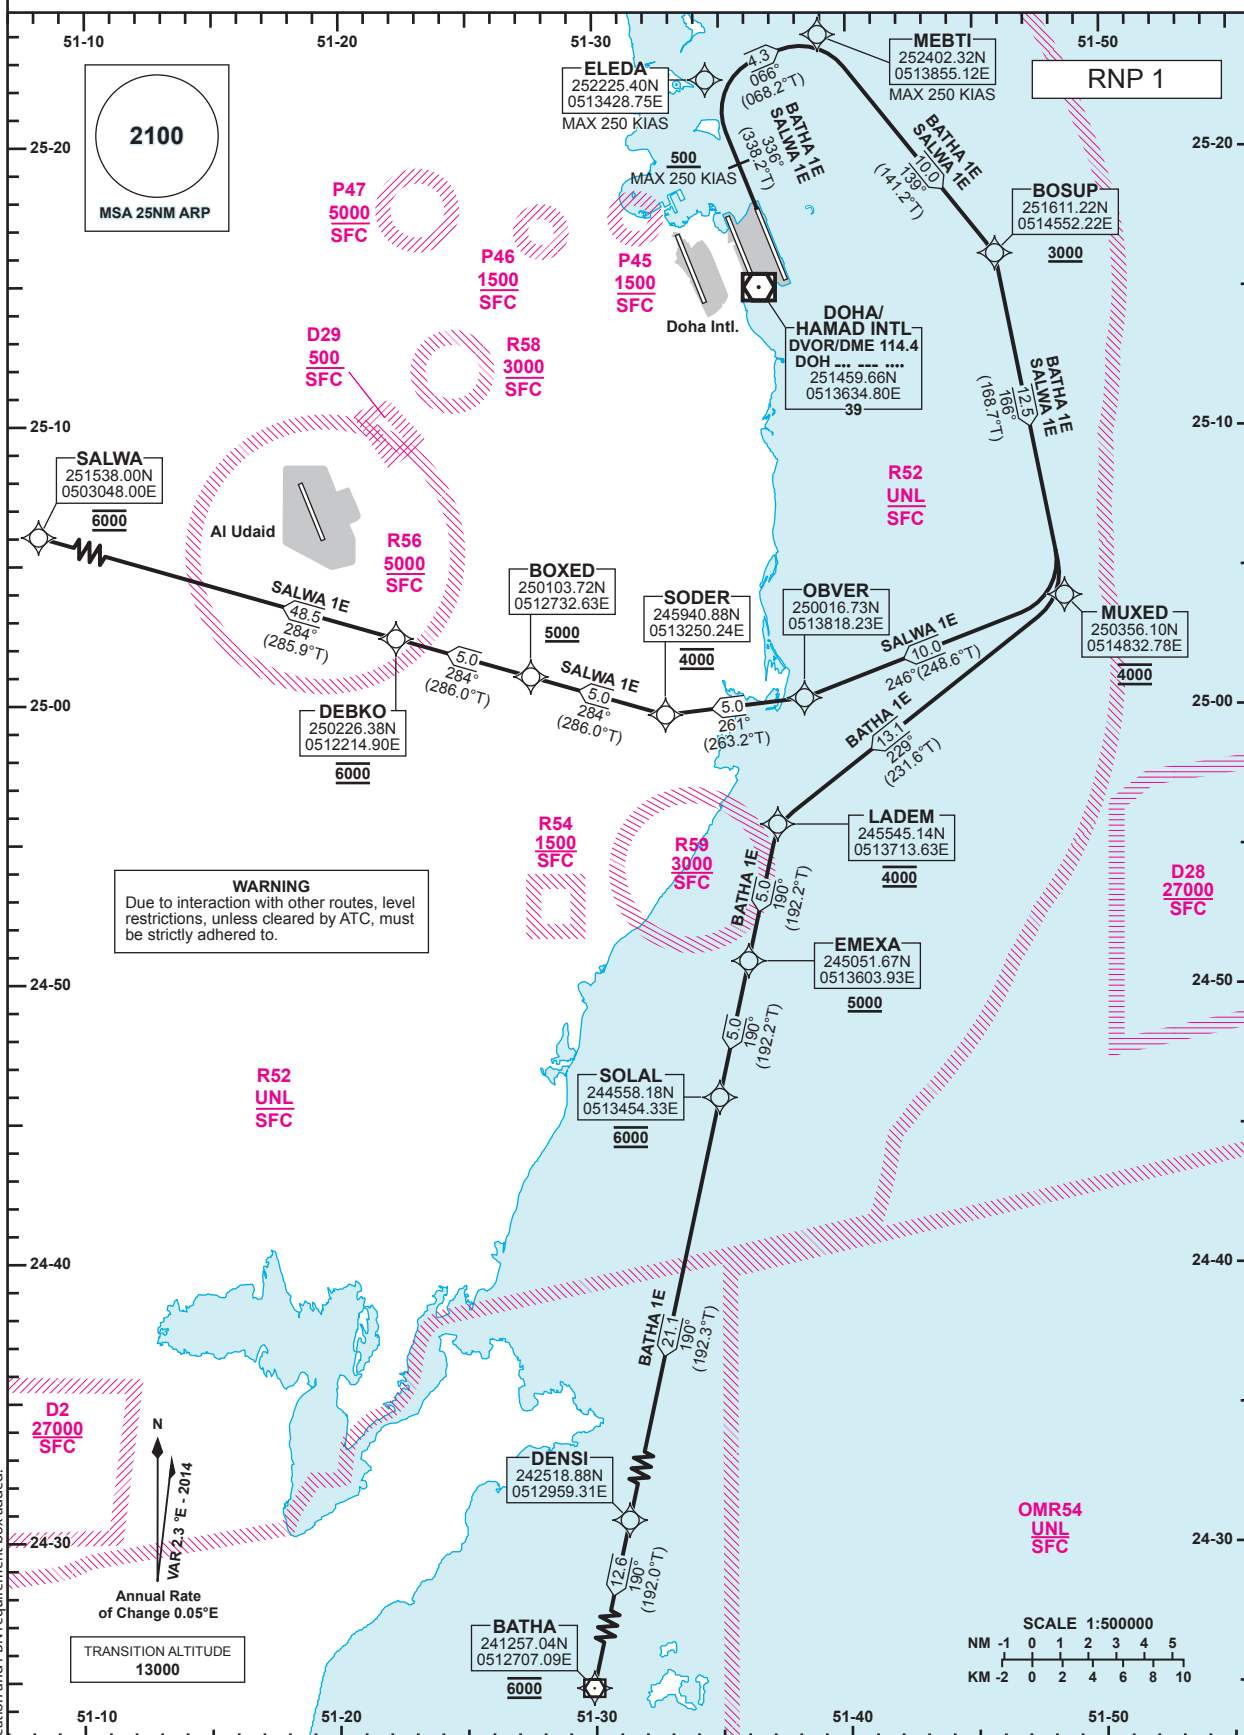


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAODIST IN NM
BEARINGS ARE MAGNETIC
ALTITUDES AND ELEV IN FEETDOHA RADAR 121.10
DOHA APP 119.725 / 120.60
TWR (EAST) 118.525 / 118.225
TWR (WEST) 118.025 / 118.225DOHA/Hamad Intl. (OTHH)
RNP RWY 34R
BATHA 1E / SALWA 1E

Route Designator	Routeing
BATHA 1E	[T338.2; A500+; K250-] - ELEDA[R; T338.2; K250-] - MEBTI[K250-] - BOSUP[A3000+] - MUXED[A4000] - LADEM[A4000] - EMEXA[A5000+] - SOLAL[A6000] - Densi - BATHA[A6000]
SALWA 1E	[T338.2; A500+; K250-] - ELEDA[R; T338.2; K250-] - MEBTI[K250-] - BOSUP[A3000+] - MUXED[A4000] - OBVER - SODER[A4000] - BOXED[A5000+] - DEBK0[A6000] - SALWA[A6000]

GENERAL INFORMATION

1. Close-in obstacles exist for Rwy 34R departures.

Standard Instrument Departure Coding Table

→ HAMAD INTERNATIONAL RNP Standard Instrument Departure BATHA 1E, SALWA 1E

→ OTHH RNP SID BATHA 1E

Serial Num	PT	WPT	Flyover	Course(T)	Magnetic Variation	Dist(NM)	Turn Direction	Altitude Description	Speed Limit	THR Elev TCH (ft)	VPA (°)	Arc Center Wpt Ident/radius (NM)	Navigational Performance
1	CA	-	-	336 (338.2)	2.3	-		+500	-250				RNP1.0
2	CF	ELEDA	-	336 (338.2)	2.3	-	R	-	-250				RNP1.0
3	TF	MEBTI	-	066 (068.2)	2.3	4.3		-	-250				RNP1.0
4	TF	BOSUP	-	139 (141.2)	2.3	10.0		+3000	-				RNP1.0
5	TF	MUXED	-	166 (168.7)	2.3	12.5		@4000	-				RNP1.0
6	TF	LADEM	-	229 (231.6)	2.3	13.1		@4000	-				RNP1.0
7	TF	EMEXA	-	190 (192.2)	2.3	5.0		+5000	-				RNP1.0
8	TF	SOLAL	-	190 (192.2)	2.3	5.0		@6000	-				RNP1.0
9	TF	DENSI	-	190 (192.3)	2.3	21.1		-	-				RNP1.0
10	TF	BATHA	-	190 (192.0)	2.3	12.6		@6000	-				RNP1.0

→ OTHH RNP SID SALWA 1E

Serial Num	PT	WPT	Flyover	Course(T)	Magnetic Variation	Dist(NM)	Turn Direction	Altitude Description	Speed Limit	THR Elev TCH (ft)	VPA (°)	Arc Center Wpt Ident/radius (NM)	Navigational Performance
1	CA	-	-	336 (338.2)	2.3	-		+500	-250				RNP1.0
2	CF	ELEDA	-	336 (338.2)	2.3	-	R	-	-250				RNP1.0
3	TF	MEBTI	-	066 (068.2)	2.3	4.3		-	-250				RNP1.0
4	TF	BOSUP	-	139 (141.2)	2.3	10.0		+3000	-				RNP1.0
5	TF	MUXED	-	166 (168.7)	2.3	12.5		@4000	-				RNP1.0
6	TF	OBVER	-	246 (248.6)	2.3	10.0		-	-				RNP1.0
7	TF	SODER	-	261 (263.2)	2.3	5.0		@4000	-				RNP1.0
8	TF	BOXED	-	284 (286.0)	2.3	5.0		+5000	-				RNP1.0
9	TF	DEBKO	-	284 (286.0)	2.3	5.0		@6000	-				RNP1.0
10	TF	SALWA	-	284 (285.9)	2.3	48.5		@6000	-				RNP1.0