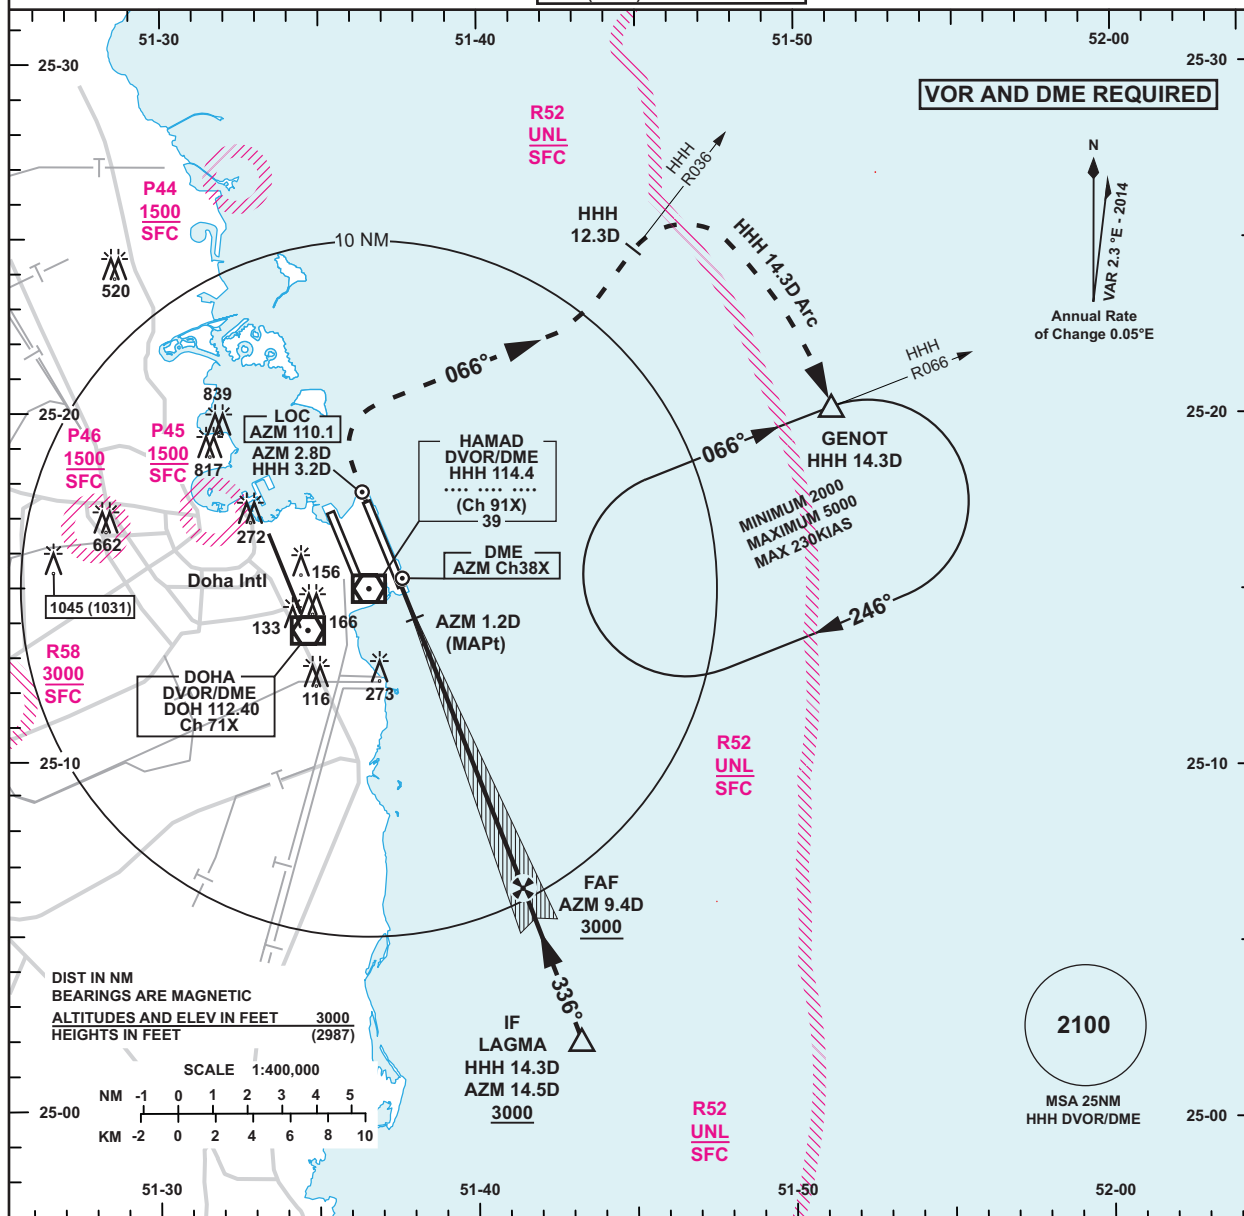


INSTRUMENT
APPROACH
CHART - ICAOAD ELEV 13
HEIGHTS RELATED
TO THR RWY 34R


DOHA RADAR	121.10
DOHA APP	119.725 / 120.60
DIRECTOR	119.40 / 121.125
TWR (EAST)	118.525 / 118.225
TWR (WEST)	118.025 / 118.225

DOHA/Hamad Intl. (OTHH)
ILS RWY 34R
ACFT CAT A,B,C,D

TA 13000

Missed Approach

Climb straight ahead, at AZM 2.8D (HHH 3.2D), turn right onto Track 066° to intercept HHH R036. At HHH 12.3D turn right to intercept the HHH 14.3D arc clockwise to GENOT and hold. Climb and maintain 4000. Missed Approach speed restriction 230KIAS

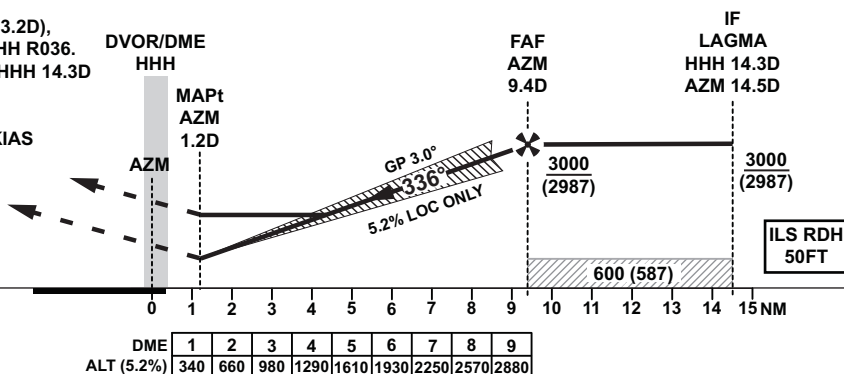ELEV 13
DME AZM

OCA (OCH)		A	B	C	D
Straight in Approach	ILS CAT I	199 (186)	210 (197)	222 (209)	235 (222)
	ILS CAT II	111 (98)	124 (111)	137 (124)	156 (143)
	LOC ONLY	320 (307)			
Circling		620 (607)		1240 (1227)	

1. AZM DME zero ranged to TDZ.
2. CAT IIIA and CAT111B APPROVED.
3. HOLD at GENOT protected for sector 3 Entry only.

LOC only Approach: MAPt at AZM 1.2D

Speed	KT	80	100	120	140	160	180
Time	MIN:SEC	Timing Not Authorized					
Rate of Descent	FT/MIN	420	530	640	740	850	960